





FEDERAL UNIVERSITY OF TECHNOLOGY, MINNA
SCHOOL OF ELECTRICAL ENGINEERING AND TECHNOLOGY &
SCHOOL OF INFRASTRUCTURE, PROCESS ENGINEERING AND TECHNOLOGY

**3rd INTERNATIONAL
ENGINEERING CONFERENCE
IEC 2019**

THEME THE ROLE OF ENGINEERING AND
TECHNOLOGY IN SUSTAINABLE DEVELOPMENT

**BOOK of
PROCEEDINGS**

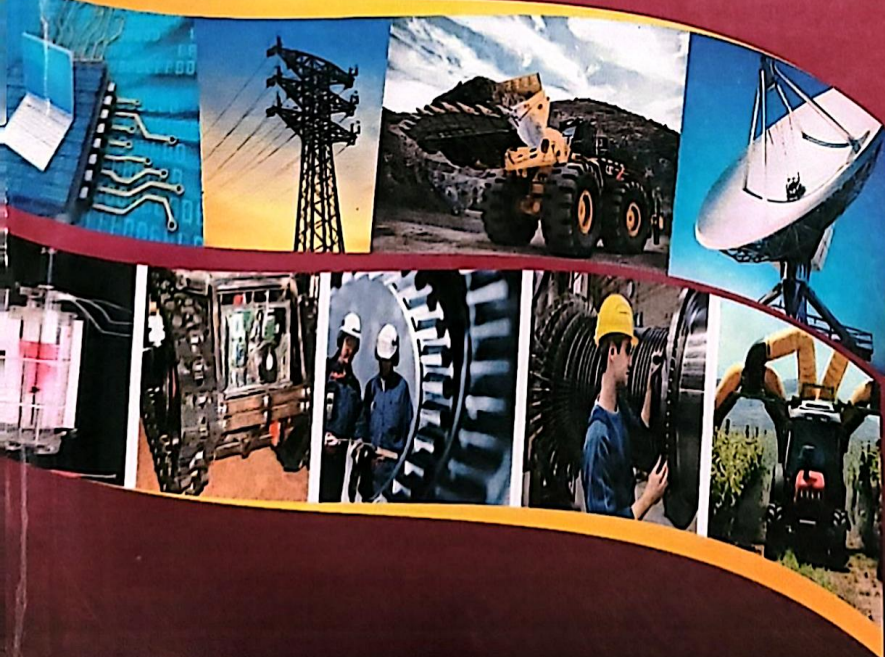

DATE:
24TH - 26TH
SEPTEMBER 2019

VENUE:
CHEMICAL ENGINEERING
LECTURE THEATER, FEDERAL
UNIVERSITY OF TECHNOLOGY,
MINNA, NIGER STATE

EDITED BY

ENGR. DR. S.M. DAUDA, ENGR. DR. A.U. USMAN, ENGR. DR. U.S. DAUDA,
ENGR. M. ABUBAKAR, ENGR. DR. E.A. AFOLABI, ENGR. DR. I.M. ABDULLAHI,
ENGR. DR. (MRS) I.H. MUSTAPHA, ENGR. A.S. AHMAD, ENGR. J.G. AMBAFI,
ENGR. T.A. FOLORUNSO, ENGR. U.U. BUHARI, ENGR. DR. OPE OSANAIYE,
ENGR. A. YUSUF



FEDERAL UNIVERSITY OF TECHNOLOGY, MINNA
SCHOOL OF ELECTRICAL ENGINEERING AND TECHNOLOGY &
SCHOOL OF INFRASTRUCTURE, PROCESS ENGINEERING AND TECHNOLOGY



DATE: 24TH - 26TH SEPTEMBER 2019

**THEME THE ROLE OF ENGINEERING AND
TECHNOLOGY IN SUSTAINABLE DEVELOPMENT**

MEMBERS OF THE CONFERENCE ORGANISING COMMITTEE

Engr. Dr. S.M. Dauda	Chairman	Engr. Dr. U.S. Dauda	Member
Engr. Dr. A.U. Usman	Co-Chairman	Engr. Dr. M.D. Yahya	Member
Engr. Prof. R.A. Muriana	Member	Engr. Dr. B.A. Orhevba	Member
Engr. Dr. T.W.E. Adejumo	Member	Engr. Dr. Michael David	Secretary

TECHNICAL COMMITTEE

Engr. Dr. U.S. Dauda	Chairman
Engr. Dr. Eytayo Afolabi	Member
Engr. Dr. A.I. Mohammed	Member
Engr. Dr. (Mrs) H.I. Mustapha	Member
Engr. A.S. Ahmad	Member
Engr. J.G. Ambafi	Member
Engr. T.A. Folorunso	Member
Engr. Buhari U. Umar	Member
Engr. Dr. Ope Osanaiye	Member
Engr. A. Yusuf	Member
Engr. M. Abubakar	Secretary

WELFARE COMMITTEE

Engr. Dr. M.D. Yahya	Chairman
Engr. Prof. R.A. Muriana	Member
Engr. Dr. A.J. Otaru	Member
Engr. Dr. E.A. Afolabi	Member
Engr. A. Yusuf	Member
Engr. Dr. B.A. Orhevba	Secretary

LOGISTIC COMMITTEE

Engr. Prof. R.A. Muriana	Chairman
Engr. D.N. Kolo	Member
Engr. Essien Akpan	Member
Mr. Idris Akintunde	Member
Mr. Mohammed Shehu	Member
Engr. Dr. T.W.E. Adejumo	Secretary

FINANCE COMMITTEE

Engr. Dr. B.A. Orhevba	Chairman
Engr. Prof. O.A. Olugboji	Member
Engr. Dr. M.D. Yahya	Member
Engr. Dr. H.I. Mustapha	Member
Engr. Bello Abdulkadir	Member
Engr. Buhari Umar	Member
Engr. Dr. M. Alhassan	Secretary

ICT COMMITTEE

Engr. Dr. Bala A. Salihu	Chairman
Mr Emmanuel Abba	Member
Mr Alenoghena Benjamin	Member



CONTENTS

Content	Page
Cover Page	i
Table of Content	ii
Forward	ix
Acknowledgement	x
Statistical Optimization of Biodiesel Production from Jatropha Oil Using Calcined Snail Shell Catalyst <i>Afangide, U. N., Olutoye, M. A. & Aberuagba, F.</i>	1 – 5
Development of AgNPs-MWCNTs Adsorbent for Seawater Treatment <i>Mohammed, S. M., Murlana, R. A, Agboola, J. B, Abdulkareem, A. S., Karim, I., & Yahya, M. D.</i>	6 – 14
The Role of Engineering and Technology and Sustainable Development Reducing Carbon Emission with Green and Sustainable Build Environment <i>Hashimu, L., Halilu, A, A., & Sanl, I.</i>	15 – 23
Optimization and Kinetics Study of Biodiesel Synthesis from Beef Tallow Using Calcium Oxide from Limestone <i>Ogunjobi, T. O., Olutoye, M. A. & Aberuagba, F.</i>	24 – 33
Column Adsorption Studies of Textile Wastewater Using Iron Oxide Nanoparticles doped Zeolite A <i>Alaya-Ibrahim, S., Kovo, A.S., Abdulkareem, A.S., Adeniyi, O.D. & Yahya, M.D.</i>	34 – 43
A Comprehensive Review on Use of Poly Electrolyte Complex PEC as an Adsorbent for the Removal of Heavy Metals From Aqueous Solution. <i>Achanya, B. E. & M., Auta</i>	44 – 52
Computational Fluid Dynamics Simulation of FCC Regenerator of a Refinery <i>Usman, A. A., Onifade, K.R., Mohammed, I. A., & Garba, M.U.</i>	53 – 60
Assessment of Factors Affecting Stakeholder Management in Nigeria Construction Projects <i>Okosun, B. O., Idlake, J.E., Oyewobi, L.O., & Shittu, A.A.</i>	61 – 64
Effect of Partial Replacement of Fine Aggregate with Sawdust in Light Weight Concrete Production using Bida Natural Stone as Coarse Aggregate <i>Alhaji B., Abubakar M., Yusuf A., Oritola S. F, Mohammed S. & Kolo D. N.</i>	65 – 69
Quality Assessment of Locally Available Selected Cements in Nigeria <i>Muftau, O. S., Abdullahi, M., & Aguwa, J. I.</i>	70 – 76
Development of Mix Design Guide for Normal Weight Concrete using Locally Available Materials <i>Okoh S. O.; Abdullahi M.; & Alhaji, B.</i>	77 – 82
Comparative Evaluation of Strength of Compacted Lateritic Soil Improved with Microbial-Induced Calcite Precipitate <i>K. J. Osinubi, E.W. Gadzama, A. O. Eberemu, & T. S. Ijimdiya</i>	83 – 91
Effects of Urban Growth on Surface Temperature in Parts of Katsina State, Nigeria <i>Abdulsamad Isah & Abubakar A.S.</i>	92 – 98



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Kinetic Modelling and Error Analysis of the Bioremediation of Used Motor Oil Contaminated Soil Using Palm Bunch Ash as Stimulant

Abdulyekeen, K. A., Aliyu, A., Abdulkarim, A. Y., Salls, A., & Abdulkarim, A. S. 99 – 103

Quantitative Risk Analysis for Communication Satellite Payload

Babadoko, D. M., & Ikechukwu, A. D. 104 – 113

Characterization and Grading of South Eastern Nigerian Grown *Mangifera Indica* Timber in Accordance with British Standard 5268

Mbakwe C.C., Aguwa J.I., & Oritola S.F. 114 – 120

Characterization of Palm Kernel Shell as Lightweight Aggregate in Concrete Production

Sunday I.O., Aguwa J.I. & Auta S.M. 121 – 125

Integrated Geophysical Investigation of the Failed Portion of Minna-Zungeru Road, Minna Niger State

Osheku, G. A., Salako, K. A., & Adetona, A. A 126 – 132

Partial Replacement of Fine Aggregate with Waste glass in Concrete made from Bida Natural Aggregate

Alhaji B., Kolo, D. N., Abubakar M., Yusuf A., Abdullahi, A. and Shehu, M. 133 – 137

Assessment of the Compressive Strength of Concrete Produced with Fine Aggregate from Different Locations in Minna

Aminulaj, H. O., Abdullahi, A., Abdulrahman, H. S., Alhaji, B., Joseph, O. F., Aliyu, S. Y. 138 – 143

Response Surface Optimisation of the Adsorption of Cu (II) from Aqueous Solution by Crab Shell Chitosan

Babatunde E. O., Akolo S. A., Ighalo J. O. & Kovo A. S. 144 – 151

The Linear Transformation of a Block Hybrid Runge-Kutta type Method for Direct Integration of First and Second Order Initial Value Problem

Muhammad, R., Yahaya, Y.A., & Abdulkareem, A.S. 152 -154

Groundwater Potential Mapping in Bosso Local Government Area, Niger State, Nigeria

Abubakar, U.B. & Muhammed, M. 155 – 159

Optimization of Synthesis Parameters of Silica from Bentonite Clay Using Acid Leaching

Ogwuche, A. S., Auta, M., & Kovo, A. S. 160 – 163

Chemical and Mineralogical Characterization of Locally Sourced Nigerian Clay

Sumanu, O. M., Dim, P.E. & Okafor, J. O. 164 – 167

Production and Optimization of Bioethanol from Watermelon Rind using *Saccharomyces Cerevisiae*

Igbonekwu, C. A., Afolabi, E. A., Nwachukwu, F.O. 168 – 173

Use of Carbide Waste as a Mineral Filler in Hot Mix Asphalt

Murana, A.A. & Musa, Y. 174 – 182

Review of Bio Oil Upgrading from Biomass Pyrolysis

Abdullahi, M. A, Garba, M. U, Eterlgho E. J, & Alhassan, M. 183 – 192



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Optimization study of Deacetylation Process in the Synthesis of Chitosan from Red Shrimp Using Response Surface Method <i>Atanda, A. S, Jimoh, A. & Ibrahim, A.A.</i>	193 – 204
Optimisation Study on the removal Pb(II), Cd(II) and Ni(II) from Pharmaceutical Wastewater using Carbonized African Giant Snail Shell (<i>Archachatina marginata</i>) as an Adsorbent. <i>Olanipekun, O., Aboje, A. A, Auta, M.</i>	205 – 215
Ground Electromagnetic Prospecting for Potential Ore Mineralisation Zones in Tsohon- Gurusu Area of Minna, North Central Nigeria <i>Ogale, O. D, Rafiu, A. A., Alhassan, D. U., Salako K. A., Adetona A. A. & Unuevho C.</i>	216 – 222
Magnetic and Geoelectrical Prospecting for Gold Mineralisation Within Tsohon-Gurusu Area, Part of Sheet 164 Minna, North-Central Nigeria <i>Omugbe, L. E, Salako, K. A, Unuevho, C.I, Rafiu, A. A, Alhassan, D. U, Ejepu, J. S, & Adetona, A. A.</i>	223 -228
Road Stabilization Using Cold Bitumen for Low Traffic Road <i>Kolo S. S., Jimoh, Y. A., Alhaji, M.M, Olayemi, J. & Shehu, M.</i>	229 – 233
Sawdust Ash Stabilization of Weak Lateritic Soil <i>Kolo S. S., Jimoh Y. A., Yusuf I. T, Adeleke O. O., Balarebe, F. & M. Shehu</i>	234 – 238
Radio Refractive Index and Refractive Index Gradients Variation in a Tropical Environment <i>I.M. Tukur, K.C. Igwe & J.O. Eichie</i>	239 - 243
Vocational and Technology Education: A Viable Entrepreneurship Tool for Rapid Economic Growth <i>Kareem, W.B., Abubakar, H.O. (Mrs.), Onuh, J., Abdulrahman, T.S., Abdullahi S.M.</i>	244 – 249
A 2-Step Hybrid Block Backward Differentiation Formula for the Approximation of Initial Value Problems of Ordinary Differential Equations <i>Akintububo, Ben.G & Umaru Mohammed</i>	250 – 254
Significant Delay Factors Affecting Completion Time of Public Sector Construction Projects in Niger State <i>Mamman, J. E., Abdullahi, A. H., Isah, L. M.</i>	255 – 260
Communication Frequency and Effectiveness on Construction Sites in Abuja, Nigeria <i>Mamman, J.E., Abdullahi, A.H. & Isah, M.L.</i>	261 – 269
Contribution of Quality Management Practices towards Building Collapse in Nigeria <i>Yunusa, H., Makinde, J. K., & Oke, A. A.</i>	270 – 277
Assessment of Ethical Practices at Different Stages of Public Housing Delivery in Nigeria <i>Oluwadare, D. O. & Idlake, J. E.</i>	278 – 285
Participation of Female Quantity Surveyors in the Nigerian Construction Industry <i>Nnamoko, C. E</i>	286 – 292
Performance Evaluation of WUPA Wastewater Treatment Plant Idu-Industrial Area, Abuja <i>Saidu, M., Adesiji, A. R., Asogwa, E.O., JIya, A.M. & Haruna, S.I.</i>	293 – 296
Evaluation of Strength Characteristics of Compacted Deltaic <i>Chikoko</i> Clay Stabilized with Rice Husk Ash <i>T.W.E. Adejumo & B. B. Olanipekun</i>	297 – 303



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Empirical Impact Evaluation of Sales Promotional Mix on Sachet -Water Product Distribution on Enterprise Performance: A Survey of Selected Sachet- Water Outfits in Niger State <i>Adima Julius Osaremen</i>	304 - 312
Assessing the Level of Readiness to Adopt Building Information Modelling (BIM) Amongst Built Environment Professionals In Selected Northern Nigerian States <i>Abubakar, I. T. & Oyewobi, L. O.</i>	313 – 323
Design and Implementation of an SMS-based dynamic matrix LED Display Board <i>Habibu, H., Chukwu, E. C., Latifa, Y., Haris, M. Y. & Okosun, O. E.</i>	324 – 329
An Improved User Pairing, Subchanneling, and Power Allocation Algorithm For 5G Noma System. <i>Muhammad Z.Z., Tekanyi A.M.S., Abubillal K.A., Usman A. D., Abdulkareem H. A. & Kassim A. Y.</i>	330 – 337
Automation of Agricultural Machinery Operation Systems; An Imperative for Sustainable Development <i>Bala Ibrahim</i>	338 – 343
Electricity Generation using Locust Bean Waste and Coal in a Molten Carbonate Direct Carbon Fuel Cell <i>Yakubu E., Adeniyi, O.D., Alhassan M., Adeniyi, M.I., Uthman H., and Usman A.A.</i>	344 – 349
Design of a Programmable Solid State Circuit Breaker <i>Ajagun, A. S., Abubakar, I. N., Yusuf, L. & Udochukwu P. C.</i>	350 – 354
Design of an Arduino Based RFID Line Switching Using Solid State Relay with Individual Phase Selection <i>Ajagun, A. S., Yusuf, L., Abubakar, I. N. & Yusuff, S. D.</i>	355 – 361
Development of an Improved Adaptive Hybrid Technique to Mitigate Cross-Tier Interference in a Femto-Macro Heterogeneous Network <i>Kassim, A. Y., Tekanyi, A. M. S., Sani, S. M., Usman, A. D., Abdulkareem, H. A. & Muhammad, Z. Z.</i>	362 – 370
The Level of Awareness of Electrical Safety Among Energy Users in Sokoto State <i>Umar, A., Abubakar, I. N., Yusuf, H. M. & Okosun, O. E.</i>	371 – 376
Phytoremediation of Soil Contaminated with Brewery and Beverage Effluents using <i>Cynodon dactylon</i> <i>Mustapha, H., Ehichoya, C. S & Musa, J. J</i>	377 – 384
Application of Dreyfus Model of Skills Acquisition in Curbing Youth Unemployment Among the Motor vehicle Mechanic Students' in Nigeria <i>Aliyu Mustapha, Abdulkadir Mohammed, Abubakar Mohammed Idris & Benjamin Oke</i>	385 – 390
A Numerical Analysis of Convective Heat Transfer Rate from A Wavy Fin Projecting Horizontally From A Rectangular Base <i>Okon, J. O.</i>	391 – 396
Towards A Hybrid MQTT-COAP Protocol for Data Communications In Wireless Sensor Networks <i>Nwankwo, E. I, Onwuka, E. N & Michael, D.</i>	397 – 403
Toward a Hybrid Technique for Friends Recommendation System in Social Tagging <i>Usman Bukar Usman</i>	404 – 410
Towards A Model for Aspect Based Sentiment Analysis of Online Product Review <i>Abdulganilyu, O. H. & Kabiru, U.</i>	411 – 418



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Parametric Oscillations in Electric Oscillatory System

Enesi A.Y., Ejiogu. E. C.

419 – 423

Fenestration Effect on the Adequacy of Classroom UDD

Azodo, A. P., Onwubalili, C. & Mezue T. C.

424 – 431

Prediction of Upper Limb Functional Ability in Post-Traumatic Patients Using Machine Learning.

Zaiyanu Nuhu, Yeong Che Fai, Elijah David Kure, Ibrahim B. Shehu, Mahmoud Mustapha, Rabiul Al-Tanko & Khor Kang Xiang

432– 441

Arduino Based Automatic Irrigation System

Ibrahim Bashir Shehu, Zayyan Nuhu & Rbiu Altanko Ummaisha

442 – 448

Production and Application Potentials of Sugarcane Bagasse Reinforced Polymer Composites for Acoustic Control

Sanda Askira Damboama

449 – 456

Electromagnetic Field analysis of a Single-phase Induction Motor based on Finite Element Method

Omokhafa J. Tola, Edwin A. Umoh, Enesi A. Yahaya, Chika Idoko, Ayo Imoru

457 – 463

Parameter Investigation and Analysis for Elite Opposition Bacterial Foraging Optimization Algorithm

Maliki, D, Muazu, M.B, Kolo, J.G, & Olaniyi, O.M.

464 – 471

Multi-Access Edge Computing Deployments for 5G Networks

Mosudi, I. O, Abolarinwa, J, & Zubair, S.

472– 479

Suitable Propagation Models for 2.4 GHz Wireless Networks: Case Study of Gidan Kwano Campus, FUT MINNA.

Ogunjide, S. B., Usman, A. U., & Henry, O. O.

480 – 488

A Survey on Mobile Edge Computing: Focus on MEC Deployment, Site Selection Problems and Application Scenarios.

Atolagbe, M. I, Osanaiye, O.

489 – 496

Influence of Processing Techniques and Packaging Materials on Anti- Nutritional Properties of Soybean Flour

Orhevba, B. A., Anehi, A. & Obasa, P. A.

497 – 503

Prospects and Challenges of Off-Grid Power Generation For Rural Communities in Nigeria – Theoretical Perspective

Dangana Audu & Ikechuku A. Diugwu

504 – 509

Spectrum Occupancy Measurement in the VHF Band- Results and Evaluation in the Context of Cognitive Radio

Ajilboye, J.A, Adegboye, B.A, Aibinu, A.M, Kolo, J.G

510 – 514

Modelling and Simulation of Adaptive Fuzzy-PID Controller for Speed Control of DC Motor

Timothy Onyechokwa, Adegboye B. A. & A.S. Mohammed

515 – 520

Implementation of Remote Patient Monitoring System using GSM/GPS Technology

Umar Abdullahi, Salihu Aliyu Oladimeji, Waheed Moses Audu, Muslim Saidu, Manasseh Wayo

521 – 527

Comparism of Adaptive Neuro Fuzzy Inference System and Support Vector Machine for the Prediction of Immunotherapy Warts Disease

Abisoye,B.O, Abisoye, O.A, Kehinde Lawal, Ogunwede E mmanuel

528 – 536



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Prediction of Epileptic Seizure using Support Vector Machine and Genetic Algorithm <i>Abisoye, O. A, Abisoye, B.O, Ekundayo Ayobami, & Ogunwede Emmanuel</i>	537 – 542
The Prediction of Cervical Cancer Occurrence Using Genetic Algorithm and Support Vector Machine <i>Abisoye, O. A, Abisoye, B.O, Ekundayo Ayobami & Kehinde Lawal</i>	543 – 549
Performance Evaluation of Ant Lion Optimization and Particle Swarm Optimization for Uncapacitated Facility Location Problem (UFLP) <i>Shehu Hussaina & Morufu Olalere</i>	550 – 558
Potential, Barriers and Prospects of Biogas Production in North- Central Nigeria <i>Ahonle Jennifer Eferi & Adeoye Peter Aderemi</i>	559 – 564
Design Analysis of Manually Operated Machine for On-Row Transplanting of Paddy Rice <i>Ibrahim, T. M., Ndagi, A., Katun. I. M. & Anurika, U. A.</i>	565 – 572
Investigation of Vulnerability of Oil and Gas Critical Infrastructures and Developing a Tracking Algorithm to track Malicious Attacks on the Streams <i>Isah, A.O., Alhassan, J.K, Idris, I., Adebayo, O.S., Onuja, A. M.</i>	573 – 580
Optimization of Process Variables in Bio-Waste Based Activated Carbon Preparation Using Response Surface Methodology. <i>Onuoha, D. C., Egbe, E. A. P., Abdulrahman, A. S. & Abdulkareem, A. S.</i>	581 – 589
Development of a Petroleum Pipeline Monitoring System for Detection, Location and Characterization of Damages in Pipes <i>Aba, E. N, Olugboji, O. A, Nasir, A, Oyewole, A, & Olutoye, M. A.</i>	590 – 598
Analysis of Maximum Power Point Tracking (MPPT) Techniques under Different Atmospheric Conditions: Technical Review <i>Dania, D. E, Tsado, J, Nwohu, M, & Olatomiwa, L.</i>	599 – 608
Development OF Briquette-Powered Water Distiller <i>Muhammadu M. M, Unugbai, J. A, Bako M. D., Abubakar J. A.</i>	609 – 614
Impact of SVC and DG Coordination on Voltage Constrained Available Transfer Capability (VSATC) <i>Sadiq A. A, Adamu S. S, Abubakar I. N. & Yusuf L.</i>	615 – 619
Construction of a Solar Powered Battery Forge <i>Adimula, M. G., Abubakre, O. K., Muriana, R. A.</i>	620 – 625
Financial Assessment of the Flood Risk Preparedness of Some Selected States in Nigeria <i>Idachaba, A, Makinde, J & Oke, A.</i>	626 – 631
Development of Spin Dryer Machine <i>Alhassan T. Yahaya & Muhammadu M. M.</i>	632 – 641
Assesment of Quality Control Management in Sachet Water Packaging <i>T.J Bolaji and A.A. Abdullahi</i>	642 – 648
Survey of Tractor Usage and Parts Breakdown in Niger State, Nigeria <i>Dauda, S. M., Abdulmalik M.K., Isyaku M. I., Francis A.A. & Ahmad D.</i>	649 – 654



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Development of an Inspection Methodology for Peugeot 508 <i>Bala Dauda & James Oseni Abu</i>	655 – 660
Design and Fabrication of Banana Fiber Extractor machine and Performance Evaluation for the Reinforcement of Composites <i>Odii Kinsley Chika & Ademoh N.A.</i>	661 – 667
Optimisation of Biodiesel Production from Sandbox (<i>Hura Crepitans</i>) Seed Oil <i>Usman M., Adebayo S., Aliyu M. & Dauda, S. M.</i>	668 – 676
A Multi-source Broadband Radio Frequency Energy Harvester with Cascaded Diversity Combiner for Mobile Devices <i>Ihemelandu, J. C., Onwuka, E. N., David, M., Zubair, S. & Ojerinde O. A.</i>	677 – 683
Artificial Neural Network (ANN), a Formidable Tool for Atmospheric Forecasting. A Review <i>Usman M.N., Aku I.G. & Oyedum O.D.</i>	684 – 692
Development of a Model for Generation of Examination Timetable Using Genetic Algorithm <i>Ahmed A., Umar B. U., Abdullahi I. M., Maliki. D., Anda I. & Kamaldeen J. A.</i>	693 – 700
Smart Protection of Vehicle using Multifactor Authentication (MFA) Technique <i>S. Aliyu , Umar Abdullahi, Majeedat Pomam, Mustapha Hafiz, Adeiza Sanusi, & Sodiq Akanmu</i>	701 – 710
Development of Production Frame Work to Mitigate Corrosion in Under Groung Tanks <i>Emenuwe Vincent & Aliyu Abdullahi</i>	711 – 715
Physical Property Modification of Vegetable Bio-Cutting Oil Using Garlic as EP Additive <i>Sanni John</i>	716 - 719
Soil Moisture and Nutrients Control: An Automated Design Proposal <i>Mustapha Mohammed, Elijah David Kure & Yusuf Mubarak</i>	720– 727



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



STA
JON

FORWARD

The School of Engineering and Engineering Technology, Federal University of Technology, Minna, organized the 1st and 2nd International Engineering Conference in 2015 and 2017 respectively. With the emergence of the new School of Electrical Engineering and Technology and the School of Infrastructure, Process Engineering and Technology, the two schools came together to organize this 3rd International Engineering Conference (IEC 2019) with the theme: "The Role of Engineering and Technology in Sustainable Development" considering the remarkable attendance and successes recorded at the previous conferences. The conference is aimed at offering opportunities for researchers, engineers, captains of industries, scientists, academics, security personnel and others who are interested in sustainable solutions to socio-economic challenges in developing countries; to participate and brainstorm on ideas and come out with a communiqué, that will give the way forward. In this regard, the following sub-themes were carefully selected to guide the authors' submissions to come up with this communiqué.

1. Engineering Entrepreneurship for Rapid Economic Growth.
2. Regulation, Standardization and Quality Assurance in Engineering Education and Practice for Sustainable Development.
3. Solutions to the Challenges in Emerging Renewable Energy Technologies for Sustainable Development.
4. Electrical Power System and Electronic as a Panacea for Rapid Sustainable Development
5. Promoting Green Engineering in Information and Communication Technology
6. Reducing Carbon Emission with Green and Sustainable Built Environment
7. Artificial Intelligence and Robotics as a Panacea for Rapid Sustainable Development in Biomedical Engineering
8. Petrochemicals, Petroleum Refining and Biochemical Technology for Sustainable Economic Development.
9. Advances and Emerging Applications in Embedded Computing.
10. Traditional and Additive Manufacturing for Sustainable Industrial Development.
11. Emerging and Smart Materials for Sustainable Development.
12. Big Data Analytics and Opportunity for Development.
13. Building Information Modeling (BIM) for Sustainable Development in Engineering Infrastructure and Highway Engineering.
14. Autonomous Systems for Agricultural and Bioresources Technology.

The conference editorial and Technical Board have members from the United Kingdom, Saudi Arabia, South Africa, Malaysia, Australia and Nigeria. The conference received submissions from 4 countries namely: Malaysia, South Africa, the Gambia and Nigeria. It is with great joy to mention that 123 papers were received in total, with 0.9 acceptable rate as a result of the high quality of articles received. Each of the paper was reviewed by two personalities who have in-depth knowledge of the subject discussed on the paper. At the end of the review process, the accepted papers were recommended for presentation and publication in the conference proceedings. The conference proceedings will be indexed in Scopus.

On behalf of the conference organizing committee, we would like to seize this opportunity to thank you all for participating in the conference. To our dedicated reviewers, we sincerely appreciate you for finding time to do a thorough review. Thank you all and we hope to see you in the 4th International Engineering Conference (IEC 2021).

Engr. Dr. S. M. Dauda
Chairman, Conference Organizing Committee



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



ACKNOWLEDGEMENT

The Chairman and members of the Conference Organizing Committee (COC) of the 3rd International Engineering Conference (IEC 2019) wish to express our gratitude to the Vice Chancellor and the management of the Federal University of Technology, Minna, the Deans and all staff of the School of Electrical Engineering and Technology (SEET) and the School of Infrastructure, Process Engineering and Technology (SIPET) for the support towards the successful hosting of this conference. We also thank the entire staff of the university who contributed in one way or the other. We are sincerely grateful to you all.

REVIEW OF BIO OIL UPGRADING FROM BIOMASS PYROLYSIS

Abdullahi, M. A¹, Garba, M. U², Eterigho E. J³, & Alhassan, M⁴
Chemical Engineering Department, Federal University of Technology, PMB 65
Minna, Niger State, Nigeria.

Corresponding author email: abdulmusavespa@gmail.com, +2348035312720

Pyrolysis is a promising method of converting biomass to renewable bio-oil. However, bio-oil is crude and its use in conventional engines is restricted without efficient procedure for upgrading. A critical literature review of the current status of production and bio oil upgrading from biomass pyrolysis is presented with the aim to identify new areas for further research. The technology of thermochemical process is described. The bio-oil is characterized by undesirable properties that affect its use. These properties need to be improved upon and this aspect is considered in terms of physical, chemical and catalytic upgrading. The increasing diversity of catalytic process, particularly the current trend of dehydrogenation and deoxygenation to eliminate coke formation and increase bio-oil yield was highlighted.

Keywords: *Biomass, Catalyst, Coke, Plastic, Pyrolysis.*

1 INTRODUCTION

Growing energy depletion in the world has driven the improvement of technologies from renewable sources, such as biomass, geothermal, solar, tidal power and wind. (Brenda *et al.*, 2019). Utilisation of biomass derived fuels and chemicals would help significantly in reducing anthropogenic CO₂ emissions by providing alternatives to the consumption of traditional fossil fuels Alexander *et al.*, (2019). Renewable resources are the natural sources that can be replenished after its consumption. It can be classified into sustainable (those that can be naturally renewable) and those that can be renewable with careful planning and harvesting. The most common examples of renewable resources are solar energy, wind power, tides, hydroelectricity and geothermal power. While biomass and biofuel are examples of renewable obtained after careful planning and harvesting (Aterny *et al.*, 2011).


2 THERMOCHEMICAL CONVERSION PROCESSES

Thermochemical methods are more energy efficient and cost-effective (Leibbrandt *et al.*,

2011) compare to Biochemical conversions of biomass which is not cost-effective owing to the fact that the biochemical techniques can solely take advantages of cellulose and hemicellulose in lignocellulosic biomass (Anex *et al.*, 2010). These conversion technologies include torrefaction (between 200 -300 °C), pyrolysis (350-600 °C), gasification (above 800 -1200 °C) and combustion (800- 1500°C).

2.1 COMBUSTION

Combustion is a process of converting organic material such as biomass (woods, straw, bark residuals, sawdust, sawmills, switch grass and so on) by means of burning to create heat and later, to generate power through steams. The conversion can be briefly described as follows:



Note: CH_{1.44}O_{0.66} is the approximate chemical equation for the combustible portion of biomass.

Though, the amount of heat produced during combustion of biomass varies depending on species, climate, and other factors, but it is

generally about 20 Megajoules of energy per dry kilogram of biomass (Ciolkosz, 2014).

2.2. GASIFICATION

Gasification of biomass is a unique method that converts organic materials (carbon-based) in partial oxidation (not sufficient oxygen to allow for completely combustion) resulting in production of combustible gases consisting of Carbon monoxide, Hydrogen and traces of Methane. These gases when combined, producer gas or syngas is formed through different steps of thermo-chemical reactions. The gas has a low-heating value fuel with a calorific value within the range of 4.2-5.02 MJ/ Nm³ (Reed *et al.*, 1982). The gas is usually used in internal combustion engines, for direct heat applications and production of chemical such as methanol.

2.3 PYROLYSIS

Pyrolysis is thermal degradation of biomass that takes place at temperature in which the biomass material is subjected to heat in the presence of inert gas (absence of oxygen). The thermal degradation of biomass in the absence of oxygen usually occurred at 400 – 600°C (Ralph, 2002). The products include oils or tars, water, charcoal (or more correctly a carbonaceous solid), and permanent gases including methane, hydrogen, carbon monoxide, and carbon dioxide.

The process is carried out as slow or fast pyrolysis. Fast pyrolysis of biomass could obtain the highest mass yield (up to 80 wt% of dry feed) of liquid fuel and retain most energy (up to 70%) in the liquid products (Serrano *et al.*, 2011). Thus, the resultant fast pyrolysis oils have been viewed as the cheapest liquid biofuels and have attracted crucial attention at research over the past two decades. Furthermore, fast pyrolysis of biomass is on the verge of commercialization (Butler *et al.*, 2011).

2.4 BIO-OIL FROM PYROLYSIS OF BIOMASS

The products obtained from pyrolysis of biomass are char (carbonaceous solid),

condensable gas (collected as oils or tars), and non-condensable gas (methane, hydrogen, carbon monoxide, and carbon dioxide). The nature of these changes depends on the heating rate of the material, the type of material undergoing pyrolysis and the pyrolysis temperature of the material. A typical example of biomass materials includes wood, animal and plant wastes. The biomass materials are poor conductor of heat; therefore, it is important to manage the heating rate. The main biomass pyrolysis reaction is



2.4.1 SLOW PYROLYSIS

Slow pyrolysis is also known as carbonization. It is performed at temperature range of 200-300°C or above 300°C residence time of 1 hour to several hours. It is referred to as torrefaction when it carried out a temperature range of 200-300°C, so that it resulted in near complete decomposition of its hemicellulose content in such a way that the mass and energy yield of solid product is maximize. But when it is performed at higher temperature above 300°C, it produces more energy dense fuel with high energy yield. The yield of products obtained from carbonization includes 35% each of char and gas, 30% bio-oil (Bridgwater, 2012).

2.4.2 FAST PYROLYSIS

In fast pyrolysis, biomass decomposes quickly to produce more vapour, charcoal and gas. The vapour is rapidly cool and a dark brown liquid is formed. Fast pyrolysis is carried out at temperature between 400 and 600°C, high heating rate (20 °C/min) and short residence time (< 2 s) for vapours. Also, if the residence time of fast pyrolysis decreases, the liquid yield increases, and the yields of gas and char decrease. The yields of product are: 80% bio-oil, 12% char and 13% gas (Bridgwater, 2012). Pyrolysis gas can be converted into fuel gas in the presence of oxygen and steam. Fuel gas is used as a fuel in Kiln, steam boiler, internal combustion engine and gas turbine.

Intermediate pyrolysis is carried out at temperature range of 400–500°C and has vapour residence time of about 10–30s. It is characterized with a low heat transfer rate which favours production of bio-oil with less tar. It is considered economical since the product is used directly as fuel engines. The yield of bio-char is 20–30%, gas 10–20%, and bio liquid of 50–60% for intermediate pyrolysis.

Figure 1 indicated the product distribution obtained from different modes of pyrolysis of woody biomass.

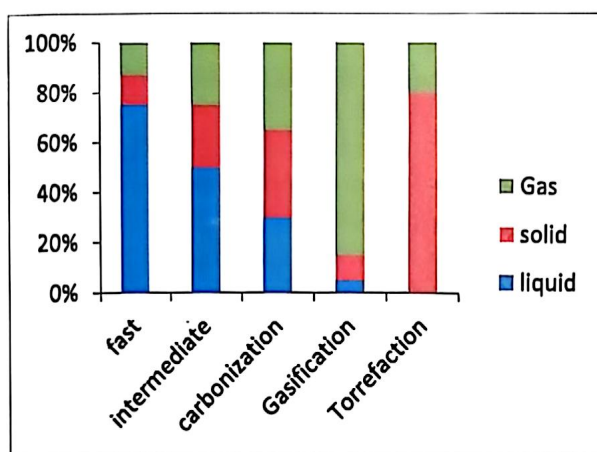


Figure 1: Mode of pyrolysis from wood biomass

2.5 PHYSICAL PROPERTIES OF PYROLYSIS OILS FROM BIOMASS

The analysis and characteristics of bio oil qualities produced from biomass for various direct applications is very significant. The quality of any bio oil depends on its physical and chemical properties as well as the suitability of the oil for a specific function. The physical properties of bio oil include: viscosity, heating value, density, water content, oxygen content, pH value, density and solid contents. While some of chemical compounds present in the bio-oil includes: various functional groups and their chemical bonding.

2.5.1 HEATING VALUE

The heating value is also known as the calorific value that ascertains the energy content present in oil (Bardalai, 2015). Calorific value can also be referred to as enthalpy of complete

combustion of a fuel where all carbon and hydrogen are converted to CO₂ and H₂O respectively (Varmuza *et al.*, 2007). As the calorific value of oil increases, the oil can become more efficient and useful for different applications. The calorific value in most of the bio-oils are basically found within the range of 15- 36 MJ/kg which is always lower than the value of 40-50 MJ/kg for conventional petroleum fuels (Pattiya *et al.*, 2009).

The calorific value of a bio-oil mainly depends on factors such as water content, oxygen content, temperature and heating rate of the pyrolysis process. Normally, the presence of oxygen in significant amount increases the water content thereby reducing the amount of hydrocarbon (Mohanty *et al.*, 2011). Consequently, calorific value become affected and will not improve even if the bio oil undergoes any of upgrading methods. For example, eucalyptus wood, rice straw and waste bamboo have calorific value within the range of 16-19 MJ/kg, this value is much lower than the value of 40-50 MJ/kg for the conventional petroleum fuels despite the fact it undergoes upgrading (Kumar *et al.*, 2010).

Hydrothermal pyrolysis is a good technique for upgrading bio oil quality, by using this technique, the calorific value increased up to 36-39 MJ/kg which is much better than other pyrolysis oil (Xiu *et al.*, 2010).

2.5.2 WATER CONTENT

The water content in oil is often refers to as the amount of moisture present in the oil. The presence of moisture in high amount in bio oil can leads to separation of water (aqueous phase) and the heavier organic phase therefore, which make the application of bio-oil more difficult. Generally, the water content present in the pyrolysed oil from most of biomasses is found in the range of 10-40 wt. % (Bardalai, 2015).

There are various methods that have been applied to reduce water content in bio oil. They include: solvent, condensation, hydro-

decoxygenating, and electrostatic precipitator (ESP). Although the addition of solvent such as methanol can improve the flow quality of the oil, the water content increases. It has been demonstrated that condensation collected at lower temperatures shows a positive improvement of bio oil, for instance condensation at -5°C contains less water content when compared to the condensation collected at 50°C (Asadullah *et al.*, 2007).

2.5.3 VISCOSITY

Viscosity of bio oil is the property that determines the characteristics of flow quality of bio liquid. The inherent bio oil viscosity obtained from biomasses does not depend largely on the type of reactor rather on other parameters. The parameters include: biomass feedstock, ageing of bio-oil, temperature, condensation, electrostatic precipitator (ESP) and water content (Bardalai *et al.*, 2015).

Viscosity also increases by condensing the vapour at very lower temperature such as -5°C , again the effect of installation of electrostatic precipitator (ESP) is to improve the quality of bio-oil in terms of calorific value, but it seriously affected the viscosity, which make the viscosity increases to a very high value (Yin *et al.*, 2013). Hydrothermal pyrolysis gives high viscosity, for example in hydrothermal pyrolysis of swine manure; the viscosity is $0.843 \text{ N}\cdot\text{s m}^{-2}$ at temperature of 50°C .

Several methods or processes can be applied to reduce the viscosity of pyrolytic oil, for instance, addition of polar solvents like methanol or acetone reduces viscosity of pyrolytic oil but at the same time, it effects on some other properties also. The effect of temperature occurred when temperature increases, the viscosity continuously reduces, for example viscosity of $0.0132 \text{ N}\cdot\text{s m}^{-2}$ measured at temperature of 40°C and continuously decreasing to $0.002 \text{ N}\cdot\text{s m}^{-2}$ when the temperature rose to 90°C .

2.5.4 ACIDITY

The acidity of bio-oils is usually determined as a numeric scale to specify oil concentration. While the pH of bio oil is hydrogen potential that measures the acidity from 0-14 as well as representation of the oil corrosiveness. The pH test method is useful for bio oil applications in which corrosive oil could cause significant damage. The bio-oils mostly contain organic acids such as acetic, carboxylic and formic acids. As the pH value of bio-oil becomes less, the oil becomes more acidic.

Because of the higher acidity, the bio-oil becomes corrosive and hence corrosion resistance material should be used in the bio-oil production and storage system. The pH value in the bio-oil depends on the type of biomass used for the bio-oil production. The pH of bio-oil is mostly within the range of 2-4 but few biomasses also have higher pH value (>4) such as rice straw, wheat straw and so on (Park *et al.*, 2004). On the other hand, some bio oil also have highly acidic properties as their pH value is found within 1.8-2.9, the typical example of the biomass is eucalyptus wood (Kumar *et al.*, 2010).

pH can be improve up to 4.5 by condensing the vapour at low temperature -5°C through the help of ice water mixed with a solution of sodium chloride (NaCl), instead of condensing at higher temperature $50-60^{\circ}\text{C}$ (Asadullah *et al.*, 2007).

2.5.5 DENSITY

The density of bio-oil always decreases with increase in temperature and increases by condensing at low temperature (Garcia *et al.*, 2002).

Unlike other bio oil properties such as acidity, pH, heating value and so on, the density of bio oil is always found to remain the-same within some definite range of value for instance, the density 1100 kg/m^3 remain same regardless of the installation of the hot vapour filter but, by using the ESP the density of the bio-oil could be increased to a higher value (Pattiya and Suttibak 2012).

Table 1: Typical properties of pyrolysis bio oil.

Physical properties	Bio oil
pH	1.8-4.0
High Heating Value (HHV) MJ/Kg	15-36
Viscosity (at 50°C) N·s m ⁻²	40-100
Solid wt. %	0.01-0.5
Density kg/m ³	1000-1300
Water content	10-40wt%
Oxygen	10-60wt%
Ash content	0.01-0.5

2.6 USES OF BIO OIL FROM BIOMASS

Application of bio oil refers to uses or conversion of bio oil to energy in various installed system specify as a form of technology such as power, heat, engine, turbine and so on (Asadullah *et al.*, 2007).

In Europe and USA pyrolysis oil is not competitive because of the current low prices for natural gas. In contrast, countries like Brazil have high application and availability of biomass with low prices and a higher price for natural gas, pyrolysis oil seems to be competitive. In- some countries incentives are used to mandate transport system to use pyrolysis oil to replace natural gas (Muggen, 2015).

Pyrolysis oil can be used as substitutes to heavy and light fuel oils or natural gas in existing electricity plants. Substituting pyrolysis oil for fossil fuel is achievable by medium or large scale (co-) combustion with natural gas or heating oil fired boilers, furnaces and turbines to generate heat and power generation.

By direct combustion in a boiler or furnace, pyrolysis oil can be used to generate heat. This is the simplest and straight forward application of bio oil. However, various companies have been attracted for district heating to serve as substitutes for heavy fuel oil. One of the commercial companies is Red Arrow Products pyrolysis plant in wisconsin, Canada frequently uses bio oil to generate heat for over 10 years (Freel *et al.*, 1996). Biomass technology Group (BTG) has demonstrated a successful test of co-combustion of pyrolysis oil in an industrial scale with natural gas-fired at a 350 MW power plant in Harculo, the Netherlands in 2003.

Gas turbines can be used to produce electricity and heat of CHP especially at remote locations. Currently, gas turbine has been adapted to run on pyrolysis oil to generate power, for example, Hengelo change from conventional fuel to run on pyrolysis oil to provide a 2MW class system of power generation.

Another interesting application of bio oil is ship propulsion, in this field of application; pyrolysis oil is one of the little substitutes to fossil fuels that are commercially attractive. Also, pyrolysis oil has been tested successfully on stationary diesel engines.

Initially, second-generation fuels were not considered as automotive alternative fuels in transportation because of several problems such as poor volatility, high viscosity, coking, corrosiveness and high-water content. This second-generation bio oil can be derived from pyrolysis oil through different methods such as: direct upgrading, co-refining in existing oil refineries or through synthesis gas and subsequent synthesis processes such as methanol. Also Chemicals such as methanol, acetic acid, turpentine, tars, medical oil, furfural and so on can be obtained from pyrolysis of oil.

2.7 UPGRADING OF BIO-OIL

In order to upgrade the fuel quality from bio-oil, a complete deoxygenation is required. There are different methods of bio oil upgrading:

2.7.1 UPGRADING OF BIO-OIL BY PHYSICAL

The following are the physical means of upgrading bio oil

- I. Filtration: using Hot-vapour filtration can decrease the ash content of the bio oil to less than 0.01%. Also, the alkali content can decrease to less than 10 ppm (Bridgwater, 2012).
- II. Solvent addition/esterification: The addition of solvents, particularly methanol, indicated a significant effect on the oil stability (Liu, 2014).
- III. Emulsification (emulsions): Pyrolysis oils are not properly miscible with hydrocarbon fuels but with support of surfactants can be emulsified with diesel oil (Ikura, 2003).
- IV. Distillation. This process is based on the different boiling point of every single component; the bio-oil can be divided into pseudo gasoline, pseudo diesel and pseudo aviation kerosene (Czernik, 2004).

2.7.2 UPGRADING OF BIO-OIL BY CHEMICAL

Upgrading of bio-oil by chemical means is a good potential to improve the quality by separating the bio-oil into value added chemical groups. Various approaches for upgrading bio oils into value added chemical products by means of extraction include: chemicals produced from the whole bio-oil, chemicals from fractionation of bio-oil, specific chemicals.

Liquid-liquid extraction of bio oil is a technique of separating the value-added chemicals from bio oil based on their relative solubility of the oil and solvent; for example, separation of aromatics from bio oil via a water/chloroform extraction. Sugar derivatives in bio-oil can be

successfully separated from aromatics via water/chloroform extraction. Based on this separation of aromatics from bio-oil, aromatics utilization in the bio-oil will serve as a great feedstock for fine chemicals or fuels.

Chemicals produced from the Whole Bio-oil: The entire bio-oil can be converted into valuable chemicals by taking advantage of its most available functional groups: carboxyl, phenolic and carbonyl. The functional group will be subjected to reaction in such a way that the non-reacting part of bio-oil would not have to be separated from the final product. For example, phenols and carboxylic acids can certainly react with lime to form calcium salts and phenates.

2.7.3 UPGRADING OF BIO-OIL BY CATALYTIC


Most of the experimental studies reported in the literature employed the use of fluid catalytic cracking catalyst such as zeolite and reforming catalyst such as transition metals supported on silica-alumina (hydro-treating) for bio-oil upgrading of biomass (Suchithra, 2012).

Hydro-treating (hydrodeoxygenation) of bio-oil has been shown technically possible but has some disadvantages. Some of the disadvantages are high coking (8–25%) cause catalyst deactivation and reactor clogging, poor quality of fuels obtained and economically not achievable.

Catalytic cracking of bio oil is a process where oxygenated organics is converted into more valuable gasoline, olefinic gases, and other products oil in the presence of shape-selective catalyst such as zeolites (Bridgwater, 2011). Removal of oxygenated compounds via zeolite such as ZSM-5 occurred at atmospheric pressure and does not required hydrogen. ZSM-5 removes oxygen from bio oil as carbon dioxide and water.

Catalytic Cracking reactions of bio oil involve the separation of C-C bonds related with decarboxylation, decarbonylation and

dehydration. In cracking reaction dehydration is the main reaction as shown in Equation 2.



3 CURRENT TRENDS IN CATALYTIC CRACKING OF BIO OIL

Pyrolysis is an attractive method of converting biomass to transportation fuels (Kockar *et al.*, 2004) and (Asadullah *et al.*, 2007). Asadullah *et al.* (2007) reported that the conversion of bagasse to bio oil fuel in a fixed bed reactor at interval of 300-600°C. The analysis showed that, the yield of oil was very low (33.0wt %), low heating values of 19.91 MJ/kg, pH of 4.5. Although, Kockar *et al.* (2004) improved the yield by comparing the effect of fixed-bed of both slow and fast pyrolysis of rapeseed (*Brassica napus L.*) at 550°C, using two reactors, namely Heinze and tubular reactor. The results showed an increase in oil yields 51.7% and 68% that is (Heinze and tubular reactors) at different heating rate (30°C min⁻¹ and 300°C min⁻¹). Ala'a H. *et al.* (2016) reported that, due to strong acid activities of a catalyst with uniform pore size; pH increased, viscosity decrease and the heating value increase up to 31.65 MJ/kg against 19.91 MJ/kg reported by Asadullah *et al.* (2007).

Iliopoulou *et al.* (2012), Aysu *et al.* (2016) and Ala'a H *et al.* (2016) reported some findings on bio oil properties and upgrading as follows: Iliopoulou *et al.* (2012) in their report compare the catalytic effect of silica sand, ZSM-5 (pure) and with that of ZSM-5 modified with nickel (Ni) and cobalt (Co). The bio oil produced from their experiment for silica sand was 58.67 wt. % (with oxygen 40.68 wt. %), ZSM-5 (pure) was 34.33 wt. % (with oxygen 4.24 wt. %) less in quantity but the quality was better. Similarly, Aysu *et al.* (2016), investigated the influence of catalyst during pyrolysis of lignocellulosic biomass in tubular and fixed bed reactor in the presence of these Ca(OH)₂, Na₂CO₃, ZnCl₂, Al₂O₃. Three catalyst showed good response of bio oil quality but less response using Ca(OH)₂.

Ala'a H. *et al.* (2016) compare the upgrading of bio oil in the presence of three catalysts: HY, H-mordenite and HZSM-5 in fixed bed reactor. The amount of liquid formed was high for HZSM-5 than HY and H-mordenite. Their results showed that the quality of liquid increased, pH increased, viscosity decrease and calorific value increased up to 31.65 MJ/kg yet quantity decreases. However, low bio oil yields and high coke that is being formed when catalyst is used which create the major problems against the effectiveness of using catalytic process (French *et al.*, 2009) and (Carlson *et al.*, 2009).

Çepeliog *et al.* (2013) reported their investigation of co-pyrolysis characteristics and kinetics of biomass-plastic blends of cotton stalk, hazelnut shell, sunflower residue, and arid land plant *Euphorbia rigida*, were blended in definite ratio (1:1, w/w) by using thermogravimetric analyzer (TGA). The analysis of kinetics showed an imperative pyrolysis mechanism and the yields of bio oil increased.

Onay *et al.* (2014) made a similar observation and confirmed that the synergetic effect during the pyrolysis of waste tire and non-food biomass at 500°C in the absence and presence of catalyst. In the presence of plastic, the analysis showed that the yield of bio oil increased. However, despite the fact that, plastic increase the quantity of bio oil but coke formation is a problem. In order to increase the quality, yield and reduce the coke, catalytic pyrolysis of biomass was co-fed with plastic or alcohol (Zhang *et al.*, 2016) and (Garba *et al.*, 2017). Zhang *et al.* (2016) studied the thermal degradation and kinetics of cellulose/ Douglas fir sawdust with plastics (LDPE) in present and absent of ZSM-5 catalyst by using thermogravimetric analyzer (TGA). The analysis of kinetics showed that addition of catalyst does not alter the mechanism of decomposition. However, the quality and yield increases, consequently the coke reduced.

Garba *et al.* (2017) made a similar approach by comparing the pyrolysis of wood fuel using two different polyethylenes: low density

polyethylene (LDPE) and high-density polyethylene (HDPE) over zeolite catalyst (ZSM-5) via a thermo-gravimetric analysis. It discovered that, the kinetics showed that the quality and yield of bio oil is increase when catalyst is co-fed with biomass and plastic.

Table () Trend of catalytic upgrading of bio oil

Name of author /year	Research Title	Finding	Gap Identify
Asadullah et al, 2007	Production of bio-oil from fixed bed pyrolysis of bagasse	Low yield (33.0wt %) low calorific values (19.91 MJ/kg) and pH of 4.5.	Low yield of bio oil and low calorific value
Iliopoulou et al, (2012)	Catalytic effect of silica sand, ZSM-5 (pure).	The bio oil produced from their silica sand was 58.67 wt. % (with oxygen 40.68 wt. %), ZSM-5 (pure) was 34.33 wt. % (with oxygen 4.24 wt. %).	Very low oxygen with less quantity and coke was formed.
Çepelioğlu et al. (2013)	Thermal and kinetic behaviors of	The analysis showed an imperative pyrolysis	low quality

	biomass and plastic wastes	mechanism.	
Onay et al. (2014)	The Catalytic Co-pyrolysis of Waste Tires and Pistachio Seeds	The analysis showed that the yield of bio oil increased..	The yield increased yet coke reduced.
(Garba et al., 2017)	Thermal degradation and kinetics of wood fuel with plastics (LDPE) and HDPE in present and absent of ZSM-5 catalyst by using thermo-gravimetric analyzer (TGA).	The analysis of kinetics showed that addition of catalyst does not alter the mechanism of decomposition	The quality and yield increases, consequently the coke reduced.

4 CONCLUSIONS

This paper reviews the current trend on production and upgrading of bio-oil from biomass pyrolysis. Starting from production of bio oil from biomass, the paper shows

progression in terms of quality and quantity when biomass is pyrolyse with catalysis and plastic admixture. This progression is testified to offer solution to the problems of less bio oil yield and the coke formation.

REFERENCES

- Amex, R. P., Aden, A., Kazi, F. A., & Fortman, J. (2010). *Fuel. energy*, 89, 529-539.
- Asadullah M., Rahman, M.A., Ali, M.M., Rahman, M.S., & Motin, M.A. (2007). Production of bio-oil from fixed bed pyrolysis of bagasse. *fuel*, 86(16): 2514-2520.
- Aterny, J. C., & Serrano-Ruiz J. (2011). Dumesic for energy Environment. *Science*, 4, 83-99.
- Alexander S., Xiaolei Z., (2019). Density functional study on the thermal stabilities of phenolic bio-oil Compounds. *Fuel* 255 (2019) 115732
- Bardalai M. (2015). A review of physical properties of biomass pyrolysis oil. *International Journal of Renewable Energy Research (IJRER)*, 5(1): 277-286.
- Brenda J. A., Stephane G. J., (2019). Physical, chemical, thermal and biological pre-treatment technologies in fast pyrolysis to maximize bio-oil quality: A critical review. *Biomass and Bioenergy* 128 105333
- Bridgwater A. V. (2012). Review of fast pyrolysis of biomass and product upgrading. *biomass and energy*, 68-90.
- Bridgwater, A. V. (2011). Review of fast pyrolysis of biomass and product upgrading. *ScienceDirect*, 80.
- Butler, E. Devlin, G., Meier D., & Mc Donnell I. (2011). Renewable Sustainable Energy Rev. *green chemistry access*, 15, 4171-4186.
- Carlson, T. R. (2009). Aromatic Production from Catalytic Fast Pyrolysis of Biomass Derived Feedstocks. *Topics in Catalysis*, 52: p. 241 - 252.
- Cepeliog, O., & Ullar A. (2013). *Thermal and kinetic behaviors of biomass and plastic wastes*. Energy Conversion and Management.
- Ciolkosz, D. (2014). Introduction to biomass combustion. *wood energy*, 1. Retrieved from <http://articles.extension.org/pages/31758/introduction-to-biomass-combustion>.
- Czernik, S., & Bridgwater, A.V. (2004). *Overview of applications of biomass fast pyrolysis oil* (Vol. Vol.18). Energy & Fuels.
- Freel, B., & Graham (1996). Bio-Oil Production and Utilization . *Proceedings of the 2nd EU/Canada Workshop on Thermal Biomass Processing*, 23.
- Garba, M. U., Inalegwu A., & Musa, U. (2017). Thermogravimetric characteristic and kinetic of catalytic co-pyrolysis of biomass with low- and high-density polyethylenes. *Biomass Conv. Bioref*, 1, 4.8.
- García-Pérez, M. (2002). Vacuum pyrolysis of sugarcane bagasse. *Journal of Analytical and Applied Pyrolysis*, 65(2): 111-136.

- Ikura, M., & Stanciulescu M., Hogan E. (2003). *Emulsification of pyrolysis derived bio-oil in Diesel fuel*. . Biomass Bioenergy.
- Kockar, O., Onay, O., & Metc. (2004). Fixed-bed pyrolysis of rapeseed (*Brassica napus* L.). *biomass and energy*, 291.
- Kumar, G. P. (2010). Optimization of process for the production of bio-oil from eucalyptus wood. *Journal of Fuel Chemistry and Technology*, 38(2): 162-167.
- Leibbrandt N, H., Knoetze J. H., & Görgens, J. F. (2011). Biomass Bioenergy. *energy*, 35, 2117-2126.
- Mohanty T., & Pant. (2011). Fuel production from biomass. *Indian perspective for pyrolysis oil*, 34.
- Muggen, G. (2015). Bio liquids fuel. *biomass conference*, 1. Retrieved from <https://www.btg-btl.com/en/application>.
- Onay, O. (2014). The Catalytic Co-pyrolysis of Waste Tires and Pistachio Seeds. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, 2.
- Park, Y., & Jeon. (2004). Bio-oil from rice straw by pyrolysis using fluidised bed and char removal system. *Prepr. Pap.-Am. Chem. Soc., Div. Fuel Chem*, 49(2): 800.
- Pattiya, A., & Titiloye J.O. (2009). Fast pyrolysis of agricultural residues from cassava plantation for bio-oil production. *Carbon*, 51: 51-59.
- Ralph, P., & Overend. (2002). THERMOCHEMICAL CONVERSION OF BIOMASS. *National Renewable Energy Laboratory, Golden, Colorado, USA*, 1-5.
- Reed, T. B., Graboski, M., & Markson, M. (1982). The SERI High Pressure Oxygen Gasifier. *Solar Energy Research Institute, Golden, Colorado*, 234-1455.
- Serrano-Ruiz, J., & Dumesic, C. A. (2011). *Energy Environ. Sci*, 4, 83-99.
- Suchithra, T. G. (2012). Bio-oil Production through Fast Pyrolysis and Upgrading to "Green" Transportation Fuels. *PhD Thesis*, 35-56.
- Varmuza, K., & Liebmann. (2007). Evaluation of the heating value of biomass fuel from elemental composition and infrared data. *energy fuel*, 123.
- Wang, H. Jonathan M., & Yong Wang (2013). *Recent Advances in Hydrotreating of Pyrolysis Bio-Oil and Its Oxygen-Containing Model Compounds*. America Chemical Society.
- Zhang, L. & Xuesong, J. (2016). *Catalytic co-pyrolysis of lignocellulosic biomass with polymers: a critical review*. *energy resources*.
- Zhu, X., Mallinson, R.G., & Resasco D.E. (2010). Role of Transalkylation Reactions in the Conversion of Anisole over HZSM-5. *Applied Catalysis A: General*, 379(1-2): p172-181.