

Civil and Environmental Research

ISSN 2224-5790 (print)

ISSN 2225-0514 (online)

Vol 6 No 7

2014



International Institute for Science, Technology & Education
Accelerating Global Knowledge Creation and Sharing

Performance Evaluation of Labour Output of Indigenous Construction Firms in North- Central Nigeria.

Agbo, Adakole Edwin

Department of Building, University of Technology, Minna Nigeria
E-mail: blissing4agbo@yahoo.com; Edwin.agbo@futminnaedu.ng, 2013

Abstract

This paper evaluates the performance of labour output of indigenous contractors in the North Central Nigeria with a view to measure on site, the labour output of selected craftsmen as well as structured questionnaire targeting the clients – all as a measure of indigenous contractor's performance. The data were collected through work sampling techniques and structured questionnaire designed on likert scale of 1-3. Analysis of the data was done using mean item score and direct calculation of performance using formula. The results indicate that the performance of the indigenous contractors were above average with a performance level of 0.56. The performance Ability Ratio (PAR) was 1.07 indicating that there are greater potentials for the indigenous contractors to improve. All the firms investigated scored above 0.50 on the mean item scale. This means that all the measures of performance considered were very important. Technical competence was ranked as the overall most importance of the clients measured of performance. The study concluded that the indigenous contractors perform above average contrary to the believe of the general public in Nigeria. The study also recommended that Nigerian government should consider indigenous contractors in their projects.

Introduction

Competence in management of construction projects is a goal which every construction managers and contractors are aspiring for. Bringing together the many diverse elements of construction- labour, machines, materials and management talents and successfully organizing them into existence of a new structure is an extremely creative and satisfying endeavour [1].

Many project managers and contractors perform differently. Some project managers and contractors make money while others loose it. Many claim that the difference between profit and loss depend on experience and judgment.

Performing well or bad on construction site is attached to so many variables in construction that is beyond only experience and judgment as claimed by some contractor.

Balogun [3] opined that contractors poor performance could be seen in the form of cost overrun, rework, late completion high accident rate, poor work practice, insensitivity to environment consideration.

Iyagba and Ayandele [2] grouped these variables or factors into Human capacity for work, competence of management, motivation factors, nature of job, and cultural/Religious influence. Similarly, Thomas, [4] categorized the factors affecting the performance output of contractors on site as project characteristics and work sampling study procedures. Wahab[5], Bain [6] Makulsawatudon and Emsley, [7], Orth et al [8], opined that on a construction site, the performance out put of contractors are affected by: Type, scope, layout and complexity, time frame, construction methods, weather, skill of workforce, work practices, length of work day, availability of materials, degree of supervision, Enabling environment, Government regulation and organizational size and maturity. Performance can be measured in order for it to be improved [14].

Oloko [9] categorized factors that affect performance of workers as:

- i) Factors in the employment
- ii) Factors in the individuals
- iii) Factors in life outside of employment situation

Nkado, [10], Arditi Walker, [11] identified that construction productivity, cost and time, and quality are the critical success/performance factors for a construction project. Similarly, SWIES et al [12] opined that scope of planning and scheduling, controlling of cost, workers performance, estimating and accounting are indicators of construction time performance.

An emerging science of construction management holds that every manager from the weakest to the strongest can improve job site performance [1].

Improvement only requires that management knows what to improve and how to improve them.

Contractors are constantly searching for ways to improve their performance especially there onsite labour output. Labour constitute about 30 – 50% of the total cost of construction projects, thus improving labour productivity of construction firms will enhance their general performance [2]. Since labour is of the greatest risk in construction contract it must be controlled and continuously improved [13]. The contractor with most efficient operation has a greater chance to making more money, deliver faster construction project to the project owner within time and budget [17, 15, 18].

Data for direct measurement of output on site were collect through work sampling with craftsmen at active operative level as the target group. A structural questionnaire was designed on like scale of 1-3, having the client as the target group. On the scale, High = 3, Moderate = 2, Low = 1.

The clients were sampled at random from private, individuals and government organizations across the six states of the north central Nigeria which form the population for the clients.

A total of 150 questionnaires were administered across the selected sampled population out of which 120 questionnaires were dully completed and returned for analysis.

The analysis of the data collected took two forms based on the source of the data

Data collected through work sampling on site was analyzed using formular for calculating performance, performance Ability Ratio. The performance scale ranges from 0-1.

$$\text{Performance} = \frac{\text{accomplishment}}{\text{Methods}} \dots\dots\dots 1$$

$$\text{Performance Ability Ratio (PAR)} = \frac{\text{Exemplar performance (Px)}}{\text{Current Performance (Pe)}} \dots\dots\dots 2a$$

$$\text{PAR} = \frac{Px}{Pe} \dots\dots\dots 2b$$

Data collected through questionnaire was analyzed using mean item scores (mis)

$$\text{Mis} = \frac{3N_5 + 2N_2 + N_1}{3(N_3 + N_2 + N_1)}$$

Result and Discussion

Table 1. Analysis of performance output of Construction Firms

Construction Firm	Average Performance	Exemplar Performance	Performance Ability Ratio (P.A.R)
A	0.5	0.53	1.06
B	0.3	0.33	1.10
C	0.53	0.58	1.0
D	0.52	0.58	1.08
E	1.08	1.19	1.10
F	0.51	0.54	1.06
G	0.31	0.37	1.19
H	0.52	0.55	1.06
I	0.26	0.29	1.12
J	1.05	1.10	1.05
K	0.53	0.54	1.02
L	1.04	1.09	1.05
M	0.27	0.29	1.07
N	0.51	0.53	1.04
O	0.50	0.57	1.04
Overall Average	0.56		1.07

Table 1 above shows the analysis of performance output of fifteen indigenous construction firms in North central Nigeria. The monthly performance and average monthly performance of the firms were computed and analyzed. Monthly output for the sampled population shows little variation in the crew performance. The result shows that the craftsmen are performing at a relatively the same level.

On the whole, the average monthly output shows that 46.67% of the indigenous construction firms performance averagely with 0.56 level of performance, while 26.67% performed excellently with 1.0 level of performance. On the other hand 26.66% of the firm performed poorly with 0.29 level of performance. In general the overall average performance was 0.56. This indicates that the indigenous construction firms from measurement of craftsmen output on site performed a little above average. This is contrary to the general public negative perception of the indigenous firms-saying indigenous construction firms can not perform. The perform distribution for the sampled firms for this study is shown in fig 1.

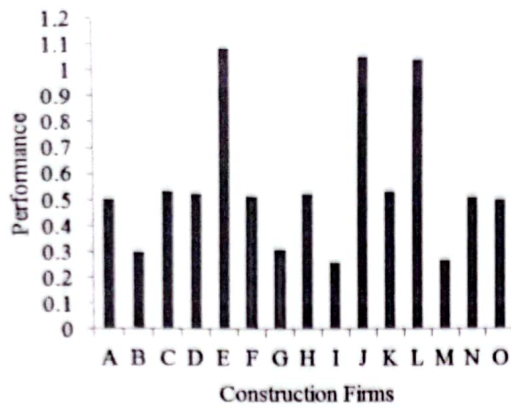


Fig. 1. Performance distribution of Construction firms in North Central Nigeria.

The performance Ability Ratio (PAR) was computed. The PAR can be used to compare current performance of the company/firm to the exemplar performance. It is used as a measure of relative worth of jobsite performance. The higher the PAR values the more chances of improvement for the firm [3]. Performance Ability Ratio value of 1-1.5 shows that there are chances of improvement for such firms [3]. The overall average PAR for the sampled population for this study was 1.07. This indicates that in all the construction firms sampled, there are greater potentials of improvement in their performance.

From the data collected through questionnaire. The numerical scores were transformed to mean item scores (MIS) so as to determine the ranking of the measures of performance. The mean item scale ranges from 0 -1. Table 2 below show the mean item scores and overall ranking of the construction firm in the North Central Nigeria.

Table 2. Client's measurement of performance

Measures of performance	Level of performance				Over-all Ranking
	Low	Moderate	High	Mis	
Technical competence	1	60	59	0.83	1
Technical capacity	6	59	55	0.80	2
Management capacity	10	60	50	0.78	3
Project of Management ability	10	58	52	0.78	3
Quality of work	0	70	42	0.76	4
Site Management ability	10	65	45	0.76	4
Communication	5	87	28	0.73	5
Relationship with site neighbor	17	65	38	0.73	5
Level of additional claims	19	68	33	0.71	6
Level of security on	20	65	35	0.71	6

site					
Contractors' relationship with client	20	66	34	0.71	6
Industrial relation	19	70	31	0.71	7
Working on schedule	22	70	28	0.68	8
Workers' welfare	23	68	29	0.68	8
Workers' budget	25	68	27	0.67	9
Safety	27	68	25	0.66	10
Level of cost overroom	26	69	25	0.66	10
Level of time overcome	29	65	26	0.66	10
Effective of project	29	68	23	0.65	11
Health facilities on site	35	62	23	0.63	12
Material waste	50	50	20	0.58	13
Storage	53	49	18	0.57	14

Low = 1, Moderate = 2, High = 3, N = 120

From table 2, the study reveals that all the construction firms under consideration scored above 0.50 on the mean item scale. This implies that the respondents considered all the measures (variables) of performance to be very important when assessing the performance of contractor handling their projects. Also table 2 indicates that overall, technical competence was ranked as the most important of their measure of performance. This was followed by technical capacity, management capacity and project management ability. The last was storage facilities.

Looking at the two methods used in measuring the performance of contractors in this study, it was revealed that the most important variable for measuring contractor's performance from client's perception was technical competence. Fortunately, the on site measurement of the contractors performance in this study was based on technical competence. The result of the on site measurement shows that technically the indigenous contractors are above average in performance. This is good news to the indigenous contractors and contrary to the believe of the general public in Nigeria that indigenous contractors perform poorly. From the review of relevant literature and personal interview with clients, it was reveal that twenty-two (22) factors as listed in table 2 have significance influence on the performance of the indigenous contractors in the North Central Nigeria.

CONCLUSION

Base on the findings of the research, the following conclusion was arrived at:-

- Indigenous contractors performed above average contrary to the believe of the general public in Nigeria
- Technical competence was ranked the most importance by client out of the project variables followed by technical capacity and management capacity and the last was storage facilities.
- Client considered all the variables used to measure contractors performance very important.

RECOMMENDATION

To further improve the performance of the indigenous construction firms in the North Central Nigeria, the following were recommended.

- Indigenous contractors should carry out periodic studies on client's need evaluation to ascertain the current needs of clients so as to meet their expectation.
- Indigenous contractors should enhance the welfare of their workers especially the technical staff to improve their output on site and their general performance.

- Recommendation is also made to the clients especially, the government to consider the indigenous contractors for her project as it has been proved that the performance of the indigenous contractors are above average.
- Lastly recommendation was made for further studies to be carried out in the same area of research considering the following.
 - a. The factors affecting the performance of indigenous contraction firms in Nigeria.
 - b. Increasing the sample by also increasing the geographical spread of the study.
 - c. Comparing the performance of the indigenous construction firms and foreign firms from craftsmen and management perceptions.

REFERENCES

- [1] Alfred, Louis Edward (1988) Construction productivity, on-site measurement and management. McGraw-Hill Book Company New York ISBN0-07-00307-7-
- [2] Iyaba, I and Ayandele, O. (1998) Analysis of factors Affecting Nigerian construction workers' Productivity. The quantity Surveyor (pg. 2-7).
- [3] Balogun, M. Oludare (2006) Clients' perception on measures of indigenous contractors performance in the Nigeria construction industry. The professional builder. Pg. 10-16.
- [4] Thomas, H.R (1991) Labour productivity and work sampling, "the bottom line" Journal const. Engineers and Management ASCE, Vol. 7, 4(10) 511-529.
- [5] Wahab, K.A. (1981) Improving Efficiency in Building Sector; West African Technical Review. 13(2) May.
- [6] Bain, D. (1982) The productivity perception. "The manager's guide to improving productivity and profit". McGraw-Hill Book Company New York.
- [7] Makulsawatudom and Margaret Emsley (2001) Factors Affecting the productivity of the construction industry in Thailand. The craftsmen perception COBRA conference paper, online on www.ncs-foundation.org. Retrieved on 22nd March 2013.
- [8] Orth, L.D, Welty S. and Jenkins JJ. (2006) Analyzing labour productivity through work sampling. ASC Proceedings of the 42nd Annual conference Colorado State University fort callings Colorado April 20-22-2006.
- [9] Oloko, O. (1983) "Factors in Labour Productivity" productivity in Nigeria, Osoba A.M.ed. PPIB and NISER.
- [10] Nkado, R.N. (1995) Construction time-influencing factors. The contractors perspective, construction Management and Economics Vol. 13, PP81-89
- [11] Arditi, D. (1985) Construction productivity improvement, journal of construction Engineering and Management, III(1), PP1-14.
- [12] Swies, J.R, Swies, JG, Abu Hammad, A.A. and rumma, A.M (2009) Modeling the variability of labour productivity in Masonry Construction, Jordan Journal of Civil Engineering Vol. 3 No. 3.
- [13] OECD (2001) Measuring productivity. OECD Manual: Measurement of aggregate and industrial level productivity growth.
- [14] Jenkins, J. and Orth, D (2003) Productivity improvement through work sampling. AACE international Transition of the Annual meeting CSC 5. 1-CSC.05.7.
- [15] Tucker, G.L. (1986) Management of construction productivity, Journal of Management in Engineering, ASCE, Vol. 2, 3 (6), 148-156.
- [16] Thomas, HR, Sanders, SR and Bilal, (1992) Comparison of labour productivity, Journal Construction Engineering and Management ASCE Vol. 118, 4 (12) 635-650.
- [17] Eldin, NN and Egger, S (1990) "Productivity improvement tools, camcorders" Journal of Construction Engineering and management ASCE, Vol. 16, 1(3) 100- III.
- [18] Maloney, WF (1893) Productivity improvement. The influence of labour". Journal of construction Engineering and management ASCE Vol. 109, 3(9) 321-334.
- [19] Sarri, S. (2006) Productivity: Theory and measurement in Business Productivity Handbook (in finish) MIDO PP272



Environmental Technology & Science Journal [ETSJ]

Volume 5 No. 1

JUNE, 2012

ISSN-2006-0459



PUBLISHED BY:

School of Environmental Technology (SET),
Federal University of Technology,

P.M.B. 65, MINNA, NIGERIA
E-mail: etsjournal2006@yahoo.com
copyright2012