



# Global Trends: Visions, Opportunities and Challenges for a Sustainable Future

## Proceedings of the International Conference on Global and Emerging Trends (ICGET)

• 2 – 4 MAY 2018 •

### EDITORS:

Bosede I. Edwards	Baba Adams Ndalai
Nyagwarimam O. Ali	Adebanjo Adekiigbe
Olakunle Elijah	Mallam Adamu Babikko
Olagoke A. Oladokun	Abubakar D. Isah
Hamman T. Gabdo	



Global Trends: Visions, Opportunities and Challenges for a Sustainable Future.

Proceedings of the International Conference on Global and Emerging Trends  
(ICGET)

2 – 4 May 2018

Editors:

Bosede Iyiade Edwards, Ph.D  
*Imagineering Institute  
Iskandar Puteri, Johor. Malaysia*

Nyagwarimam O. Ali, Ph.D  
*Universiti Teknologi Malaysia, Johor. Malaysia*

Olagoke A. Oladokun, Ph.D  
*University of Maiduguri  
Borno, Nigeria*

Olakunle Elijah, Ph.D  
*Universiti Teknologi Malaysia, Johor. Malaysia*

Mallam Adamu Babikkoi, Ph.D  
*Federal College of Education  
Yola. Nigeria*

Baba Adams Ndalai, Ph.D  
*Federal Polytechnic, Idah  
Benue. Nigeria*

Adebanjo Adekiigbe, Ph.D  
*Federal Polytechnic, Ede  
Osun. Nigeria*

Abubakar Danladi Isah  
*Federal University of Technology  
Minna. Nigeria*

Hamman Tukur Gabdo  
*Baze University, Abuja  
FCT, Nigeria*

## Table of Contents

<b>FOREWORD</b> .....	<i>iv</i>
<b>Conference Chairs</b> .....	<i>ix</i>
<b>Program Chairs</b> .....	<i>ix</i>
<b>Conference Committee</b> .....	<i>x</i>
<b>Keynote Speakers</b> .....	<i>xi</i>
<b>List of Reviewers</b> .....	<i>xii</i>
<b>ARTS AND EDUCATION</b> .....	<b>1</b>
<i>Using Outdoor Activity to Enhance the Understanding of Science Concepts among Students from Non-Science Background</i> .....	<i>2</i>
<i>Effects of Implementation of Problem-Based Learning on Students ‘Academic Achievement and Attitudes Towards Learning Chemistry</i> .....	<i>6</i>
<i>Language Learning Motivation in Global Context: From Integrativeness to the Ideal L2 Self</i> .....	<i>9</i>
<i>Smart Pedagogy of Learning Technologies: Implementing TPACK in Design and Selection of Technologies for the Future Classroom</i> .....	<i>13</i>
<i>Key Determinants of Contraceptive Use Among Married Women in North-Eastern Region of Nigeria</i> .....	<i>18</i>
<i>Relationship Between Parents’ Socio-Economic Background, Parental Involvement and Students’ Academic Performance in Higher Institutions of Learning in Adamawa State, Nigeria</i> .....	<i>25</i>
<b>BUILT ENVIRONMENT, EARTH AND ENVIRONMENTAL SCIENCES</b> .....	<b>30</b>
<i>Analysis of Trend and Dynamics of Urban Sprawl in Minna Niger State Nigeria</i> .....	<i>31</i>
<i>The Emerging Role of Pleadings in Determining Arbitrators’ Jurisdiction</i> .....	<i>35</i>
<i>Assessment of Financing Options for Housing Project Development in Lagos State, Nigeria</i> .....	<i>39</i>
<i>Embodied Energy and Carbon IV Oxide Emission Analyses of Sandcrete Blocks and Compressed Earth Bricks Houses</i> .....	<i>43</i>

<i>Land Development and Planning Regulations in Lokoja, Nigeria</i> .....	48
<i>The Roles of Town Planners in Disaster and Risk Management in Built Environment of Birnin Kebbi, Nigeria</i> .....	52
<i>Factors Critical to Industrialised Building System Performance of Nigerian Mass Housing Projects</i> .....	56
<i>Rental Housing Affordability: A Case Study of Millennium Estate, Ifako-Ijaiye, Lagos.</i>	60
<i>The Level of Students' Awareness on Maintenance of Sewer Blockage in Male Student Hostel Abubakar Tafawa Balewa University Bauchi, Nigeria</i> .....	64
<b>COMPUTING AND COMPUTING ENGINEERING</b> .....	<b>67</b>
<i>Real Time Face Recognition System based on Pattern Matching</i> .....	68
<i>Gender Classification based on Local Binary Pattern and K-Nearest Neighbour</i> .....	74
<i>From Smell Phenomenon to Smell Agent Optimization (SAO): A Feasibility Study</i> .....	79
<i>Error Correction Algorithm for SRAM Based FPGA</i> .....	86
<i>Optimized Forward Consecutive Mean Excision Algorithm for Adaptive Threshold Estimation in the Energy Detector</i> .....	92
<i>Real Time Universal Scalable Wireless Sensor Network for Environmental Monitoring Application</i> .....	97
<i>Pastoralist Optimization Algorithm (POA): A Novel Nature-Inspired Metaheuristic Optimization Algorithm</i> .....	101
<i>Design and Implementation of a Microcontroller Based Auto-Switch Power Controller</i> .....	106
<i>Performance Analysis of a Modified Otsu-based Constant False Alarm Rate (CFAR) Algorithm under Varying Signal to Noise Ratio in Radar Systems</i> .....	110
<i>Performance of the Recursive One-Sided Hypothesis Testing Technique under varying Signal to Noise Ratio Conditions in Cognitive Radio</i> .....	115
<b>ENGINEERING AND ENGINEERING TECHNOLOGY</b> .....	<b>119</b>
<i>Tribological Properties of Untreated Vegetable Oils as Automotive Shock Absorber Fluids</i> .....	120
<i>Coconut-Castor Oil Blend as Sustainable Basestock for IC Engine Oils: The Low-Temperature Fluidity</i> .....	124

# Pastoralist Optimization Algorithm (POA): A Novel Nature-Inspired Metaheuristic Optimization Algorithm

Ibrahim M. Abdullahi<sup>1\*</sup>, Muhammed B. Mu'azu<sup>2</sup>, Olayemi M. Olaniyi<sup>1</sup> and James Agajo<sup>1</sup>

<sup>1</sup>Department of Computer Engineering, Federal University of Technology, Minna, Nigeria

<sup>2</sup>Department of Computer Engineering, Ahmadu Bello University, Zaria, Nigeria

\*[amibrahim@futminna.edu.ng](mailto:amibrahim@futminna.edu.ng)

**Abstract**— This paper proposes the development of a novel optimization algorithm called the Pastoralist Optimization Algorithm (POA) inspired by the pastoralists herding strategies. The strategies are scouting, camp selection, camping, herd splitting and merging. These strategies were modelled mathematically and used to develop the POA. The performance of the algorithm was evaluated by testing the algorithm on 10 unimodal and multimodal test benchmark functions. This is to measure the algorithm exploitative, explorative, convergence speed as well as the ability to escape being trapped in a local optimum solution. Also, a nonparametric statistical test (Wilcoxon rank sum tests) was carried out to ascertain the statistical significance level of the proposed algorithm results. The experimental results obtained show that the algorithm is very competitive and obtain better results in most cases when compared with some similar existing state-of-the-art nature-inspired metaheuristic optimization algorithms. Also, it is statistical proven tht the results are very significant.

**Keyword**— Algorithms; Benchmark test functions; Nature inspired metaheuristic algorithms; Pastoralist Optimization Algorithm

## 1 INTRODUCTION

The rapid growth in technology has brought to the fore the need for faster and more accurate solutions to emerging complex real-world problems. As technology advances and our understanding of real-world Optimization problems (OP) (with their sometimes complex, multi-modal, non-linear and dynamic nature) also improves, it then becomes imperative to continue to seek for new solutions to these emerging problems in nature. Despite the successes recorded by most developed state-of-the-art meta-heuristic Optimization Algorithm (OA) inspired by different natural phenomenon to solve wide range of emerging real-world OP [1], no single OA can provide the most appropriate solution to all OP. Hence, developing a new OA that could provide better solution to some OP is still an open research problem in this field [2].

Examples of some successful NI-OA's and their inspirations include; Biogeography-based Optimization [3] inspired by the geographical distribution of biological organisms, Artificial Bee Colony [4] inspired by the foraging behavior of bees. Teaching Learning Based Optimization [5] inspired by classroom teaching and learning, Imperialist Competitive Algorithm [6] inspired by human socio-political evolution process. Others are; Grasshopper Optimization Algorithm [7] inspired by the swarming behaviors of Grasshoppers, Ant Lion Optimizer [8] inspired by the behavior of ant lion and Lion optimization algorithm [9] inspired by special behaviors of lions. This paper proposes the development of a novel NI-OA inspired by pastoralist herding strategies called Pastoralist Optimization Algorithm (POA).

This paper is structured as follows: In Section 1, optimization and review of related works were presented. In section 2, the proposed POA is presented followed by the experimental results and discussion in Section 3 and finally, conclusion and recommendation in Section 4.

## 2 PASTORALIST OPTIMIZATION ALGORITHM (POA)

In this section, the inspiration behind the proposed POA is discussed. This is followed by mathematical modelling of each pastoral herding strategy and the proposed POA.

### 2.1 Inspiration

Pastoralism is a socio-economic livestock production system characterized by extensive movement of animals in search of quality pastures and water [10]. Nomadic pastoralism among other forms of pastoralism (transhumance, semi-nomadic and sedentary) is a highly sustainable and flexible system that allows the pastoralists to manage livestock, environment and people efficiently using some highly flexible strategies. These strategies help the nomadic pastoralists to survive the unpredictable and potentially hazardous pastoral life [11]. The strategies adopted by the nomadic pastoralist include the following:

Scouting [12], Camp Selection and Camping [13], Splitting/Herd Dispersal, [14], Merging and Selection of New Camp, [15]. These strategies make nomadic pastoralism a potentially good candidate for the development of an optimization algorithm. In POA, a set of pastoralists were randomly generated to form the initial population of the search space. 25% of pastoralists are selected as scout pastoralists from the initial pastoralist population [12]. The scout pastoralists search for the best location for camping. The camps with a given radius are temporary locations where daily herding to other locations within the search area takes place. The size of the camp also depends on the size of herds and search space. During herding, pastoralist split themselves to minimize risk of getting stuck or better grazing for animals where resources are limited. This is followed by merging where the fitness of each pastoralist is evaluated and the decision for a new camp search is tak-

en.

## 2.2 Proposed POA

The nomadic pastoralist strategies described under section 2.1 were modeled mathematically as follows:

### 2.2.1 Initialization

The first step in developing the POA is to generate the population of pastoralist (nP) randomly because POA is a population-based metaheuristic algorithm. In POA, a solution is called a pastoralist which is represented in the search space as:

$$P = [P_1, P_2, P_3, \dots, P_D] \quad (1)$$

Where, P is the pastoralist and D is the dimension or number of variables of the optimization problem. The second step is to select (25%) of the pastoralist as scout pastoralist (S) represented as;

$$S = [S_1, S_2, S_3, \dots, S_D] \quad (2)$$

### 2.2.2 Scouting

After selecting the number of scout pastoralist, their locations are initialized randomly within the search space using Equation (3) and followed by evaluation of fitness of each scout. The fitness of scout j is evaluated using Equation (4) followed by sorting and selection of best scout until scouting rate is maximum, else, the scouts move into a new location guided by the previous best location using Equation (5).

$$S_j = \text{rand}([L_b, U_b]^D) \quad (3)$$

$$F(S_j) = FF(S_j) \quad (4)$$

$$S'_j = (S_{best} - S_j) + \epsilon_j * \eta_j * \zeta \quad (5)$$

Where  $\text{rand}([L_b, U_b]^D)$  is a D-dimensional random vector between the lower bound and upper bound of the search space and FF is the fitness function,  $s'$  is the new location of scout j around the best-found location  $S_{best}$ ,  $\epsilon_j$  is the energy of scout j over D-dimension ( $\epsilon \in [-1,1]$ ),  $\eta_j$  is the step size of scout j ( $\eta \in \{0, (0.001 * Ub)\}$ ) and  $\zeta$  is the scouting constant. The scout location update was modelled using some attributes (energy and walking gait) of the human movement and energy efficiency model proposed in [16].

After updating the scouts locations, their fitnesses are evaluated again using Equation (4). This is followed by sorting and selection of best scout location until maximum scouting rate ( $\alpha$ ) is reached. Equation (6) is used to prevent the pastoralist from going outside the search space.

$$S'_j = \begin{cases} \max(S'_j, L_b), & \text{if } S'_j < L_b \\ \min(S'_j, U_b), & \text{if } S'_j > U_b \end{cases} \quad (6)$$

### 2.2.3 Camp Selection and Camping

Selection of the best location for camping  $S_{C_{best}}$  is obtained by sorting and selecting the best scout in terms of their fitness after completing the maximum scouting iteration. The kth pastoralist  $P_k$  is initialized at camp C (where  $C = S_{C_{best}}$ ) using Equation (7).

$$P_k = C \quad (7)$$

### 2.2.4 Herding

The fitness of the kth pastoralist is evaluated using Equation (8) during herding. This is followed by sorting and selection of the best pastoralist  $P_{best}$ .

$$F(P_k) = FF(P_k) \quad (8)$$

### 2.2.5 Splitting

Each pastoralist split to different locations within the same camp until splitting rate ( $\beta$ ) is maximum using Equation (9) which also follows modification of [16].

$$P'_k = P_{best} + (\text{rand}(0,r) * \epsilon_k * \eta_k) \quad (9)$$

Where  $P'_k$  is the kth pastoralist new location,  $P_{best}$  is the best pastoralist so far,  $\text{rand}(0,r)$  is a random between 0 to r, r is the camp radius,  $\epsilon_k$  is the energy of the kth pastoralist over D-dimension ( $\epsilon \in [-1,1]$ ) and  $\eta_k$  is the step size of the kth pastoralist ( $\eta \in \{0, (0.001 * Ub)\}$ ). Thereafter, the fitness of the kth pastoralist is evaluated, using Equation (10) followed by sorting and selection of new best pastoralist  $P'_{best}$ . For each split, the camp radius is reduced using Equation (11).

$$F(P'_k) = FF(P'_k) \quad (10)$$

$$r'' = r' / nP \quad (11)$$

Where,  $r''$  is the camp radius of current iteration, and  $r'$  is the camp radius of previous iteration.

### 2.2.6 Merging

During merging, the best location within the camp is updated by comparing the all pastoralist best locations using Equation (12).

$$C_{best,v} = \begin{cases} P_{best}, & \text{if } P_{best} < P'_{best} \\ P'_{best}, & \text{otherwise} \end{cases} \quad (12)$$

Where,  $C_{best,v}$  is the camp best location (that is the best pastoralist within the camp) at the vth splitting rate,  $v \in [1: \beta]$ . If all locations within the camp have been exploited, the Global camp best pastoralist  $G_{C_{best,z}}$  is obtained by sorting all  $C_{best,v}$  and selection of best camp pastoralist. Where,  $z: z \in \{1: \text{max iteration}\}$  else, splits again to new locations by repeating the steps in sub-section 2.2.5 and 2.2.6. If all maximum iteration not reached, the scouts' locations are updated again using Equation (3) followed by the processes in sections 2.2.2 to 2.2.6 are repeated. The Global best pastoralist  $G_{best}$  is obtained by sorting  $G_{C_{best,z}}$  and

selecting the global best pastoralist. The steps involved in POA is summarized in Figure 1.

- i. Start
- ii. Initialize all POA parameters
- iii. Select scout pastoralist randomly from number of pastoralists and initialize scout location using Equation (3)
- iv. Evaluate the fitness of each scout, update scout locations and normalize scouts' locations within the search space until maximum scouting rate is reached (Equations (4, 5 and 6)).
- v. Select best camping location based and move pastoralist and herds to camp using Equation (7).
- vi. Evaluate fitness of pastoralist and determine best pastoralist within a camp  $P_{best}$  using Equations (8).
- vii. Split pastoralist to different locations within camp and evaluate fitness of each pastoralist using Equations (9 and 10).
- viii. Repeat step vii until maximum splitting rate is reached. For each split, divide the current camp radius by the number of pastoralist using Equation 11.
- ix. Update the best camp pastoralist  $C_{best}$  using Equation (12).
- x. If all regions within the search space have not been explored (maximum iteration not reached), update scout location using Equation (3) repeat steps iv to ix and update the global camp best pastoralist  $G_{c_{best}}$ .
- xi. Else, return the global best-found pastoralist  $G_{best}$ .
- xii. Stop

Figure 1: Proposed POA

### 3 EXPERIMENTAL RESULTS AND DISCUSSION

In this section, the experiments that were performed in order to evaluate the performance of the POA are presented. Two groups of test functions were selected to benchmark the proposed algorithm's performance, they are; Unimodal test functions (F1:F5) and the multimodal test functions (F6:F10). The dimension, range and the global optimum of each function is shown in Table 2 and their respective equations can be found in [17]. Unimodal functions have only a single global optimal solution. They are used to evaluate the algorithm exploitative capability, while multimodal test functions are used to evaluate algorithms exploration capability and ability to escape from getting stuck in local optima [8]. The algorithm was developed using MATLAB R2017a on a 64bit, 4Gig RAM computer.

Table 1: POA parameter settings

S/N	Parameter	Value
nP	Number of pastoralist	40
$\alpha$	Scout rate	5
$\beta$	Split rate	30
r	Camp radius	0.01*(Ub)
Max-it	Maximun Iteration	1000
z	Number of runs	10

Table 2: Unimodal and Multi-modal Benchmark functions

Function ID	Function Name	Dim	Range	Global optimum
F1	Easom	2	[-100, 100]	-1
F2	Schaffer2	2	[-100, 100]	0
F3	Sphere	5	[-5.12, 5.12]	0
F4	Sum of different powers	5	[-1, 1]	0
F5	Sum Squares	5	[-10, 10]	0
F6	Ackley	5	[-32.768,32.768]	0
F7	Beale	2	[-4.5, 4.5]	0
F8	Bohachevsky	2	[-100, 100]	0
F9	Cross-in-Tray	2	[-10, 10]	-2.06261
F10	Dejong N.5	2	[-65.536, 65.536]	0.998

For each function, the best (minimum), worst (maximum) and average values were recorded after 10 runs each of 1000 iterations. Other paramters of the algorithm that were used for the experiments are shown in Table 1. The results obtained were compared with some similar and successful NI metaheuristic optimization algorithms (BBO [3], ABC [4] and ICA [6]).

#### 3.1 Unimodal Test Functions Results

Table 2 shows the result obtained using POA compared to results obtained using BBO, ABC and ICA for unimodal test functions. From Table 3, it can be seen that POA obtained the global optimum value for F1 and F2 and the values obtained for F3 and F5 are the closest to the global optimum than those obtained with BBO, ABC and ICA. POA only performs less better than all the other algorithms on F4. Also, Figure 2 shows that the algorithm converges faster than others except for F1. This result is an indication of POA high exploitation capability guaranteed by the camping strategy of the pastoralist. The results also show that POA is very competitive and can be an alternative when solving problems of similar nature.

Table 3: Unimodal Test Function Results

Function	Performance	POA	BBO	ABC	ICA
F1	Best	-1	-1	-	-
	Worst	-1	-1	-	-
	Average	-1	-1	-	-
F2	Best	0	0	0	0
	Worst	0	5.5589e-4	0	0
	Average	0	1.1118e-4	0	0
F3	Best	1.1094e-106	3.2204e-19	1.2476e-29	1.6191e-53
	Worst	6.2387e-106	6.2858e-18	8.5357e-28	4.7341e-39
	Average	3.7436e-106	2.0781e-18	3.6343e-28	1.0822e-39
F4	Best	1.6592e-18	0	2.4822e-43	0
	Worst	1.5912e	0	1.7314e	0

		-17		-40	
	Average	4.8783e-18	0	3.5475e-41	0
F5	Best	1.5201e-102	1.6418e-19	7.5983e-28	6.1524e-48
	Worst	3.5312e-102	4.5778e-16	9.6766e-27	1.7365e-37
	Average	2.6457e-102	9.2557e-17	3.2322e-27	3.4767e-38

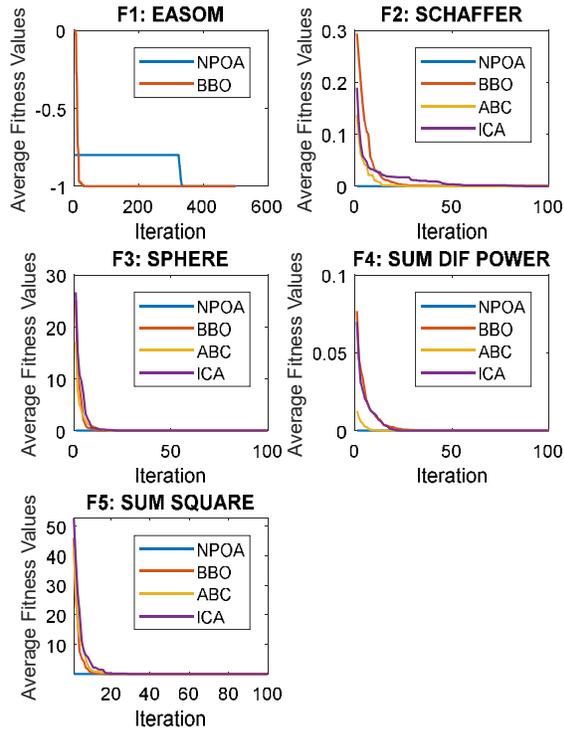


Figure 2: Convergence plot for Unimodal functions

### 3.2 Multimodal Test Function Results

Table 3 shows the result obtained using POA compared to results obtained using BBO, ABC and ICA for multimodal test functions. From Table 3, it can be seen that POA was able to obtain the global optimum for all the test functions. This is an indication of the algorithm high explorative ability and local optima avoidance. Also, the fast convergence rate of POA as shown in Figure 3 can be attributed to the effective scouting strategy of the pastoralist.

Table 3: Multi-modal Test Functions

Function	Performance	POA	BBO	ABC	ICA
F6	Best	-8.8818e-16	4.3991e-10	4.1108e-11	2.6645e-15
	Worst	2.6645e-15	5.0887e-9	1.0478e-10	6.2172e-15
	Average	-1.7764e-16	2.2748e-9	6.4982e-11	4.7962e-15
F7	Best	0	4.6577e-8	2.0226e-13	2.7325e-21

	Worst	0	3.3385e-6	1.1265e-11	1.4937e-11
	Average	0	1.1656e-6	1138e-12	3.4945e-12
F8	Best	0	0	-	0
	Worst	0	0.2183	-	0
	Average	0	0.0873	-	0
F9	Best	-2.0626	-2.0626	-2.0626	-2.0626
	Worst	-2.0626	-2.0626	-2.0626	-2.0626
	Average	-2.0626	-2.0626	-2.0626	-2.0626
F10	Best	0.998	0.998	0.998	0.998
	Worst	0.998	5.9288	0.998	0.998
	Average	0.998	2.7786	0.998	0.998

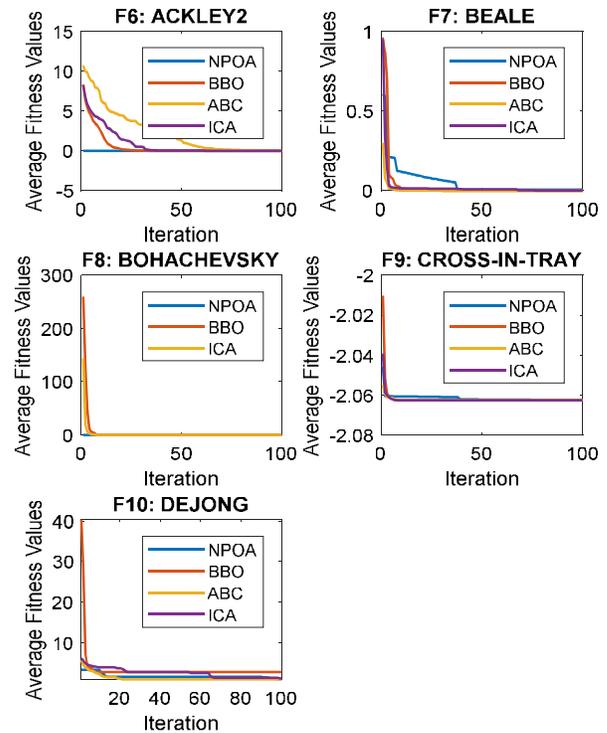


Figure 3: Convergence plot for Multimodal functions

### 3.3 Statistical Test Results

Table 4 presents the Wilcoxon rank sum nonparametric statistical test results that show how significant the obtained results are using a 5% (0.05) significance level [8]. The result indicated that there is no evidence ( $h = 0$ ) to reject the null hypothesis of equal median between the observed and test samples at 5% confidence level. With P-Value of 0.5715, POA's results for all functions is highly significant (closer to the global optimum) followed by BBO (0.2577), ICA (0.1828) and ABC (0.0951).

Table 4: Wilcoxon Rank Sum Test Results

ALGORITHM	P-Value	h
POA	0.5715	0
BBO	0.2577	0
ABC	0.0951	0
ICA	0.1828	0

#### 4 CONCLUSION AND RECOMMENDATION

A novel nature-inspired metaheuristic optimization algorithm that is inspired by the herding strategies of nomadic pastoralist is proposed in this paper. The performance of the algorithm was evaluated by benchmarking it on 10 unimodal and multimodal benchmark test functions. The results show that POA has high exploitation and exploration abilities with high convergence speed. When compared with other popular nature-inspired optimization algorithms, like BBO, ABC and ICA, the proposed algorithm outperforms all of the algorithms in most cases and provides competitive result in all cases. From the results of this study, it can be concluded that for the proposed POA:

- i. Exploration was guaranteed by scouting with longer step size.
- ii. Exploitation was guaranteed by camping with a shorter step size.
- iii. Local optima avoidance was guaranteed by splitting and merging within the camps.

For future studies using the proposed algorithm, it is recommended that;

- i. Several other benchmark functions (unimodal, multimodal and composite) should be tested to evaluate the algorithm ability to balance between exploration and exploitation.
- ii. Compare the results with those obtained from other popular population-based OA like Particle Swarm Optimization (PSO), Genetic Algorithm (GA).
- iii. Explore and model more nomadic Pastoralist strategies to improve the algorithm performance.
- iv. Apply the algorithm to solve real-world optimization problems.
- v. Investigate other movement strategies like the correlated random walk and levy flight which could improve the algorithm performance.

#### ACKNOWLEDGMENT

This work was supported in part by FUTMINNA under NEEDs Assesment Grant 2017.

#### REFERENCES

[1] N. Siddique and H. Adeli, "Nature Inspired Computing: An Overview and Some Future Directions," *Cogn Compu*, vol. 7, pp. 706-714, 2015.

[2] D. H. Wolpert and W. G. Macready, "No free lunch theorems for optimization," *IEEE Transactions on Evo-*

*lutionary Computation* 1, pp. 67-82, 1997.

[3] D. Simon, "Biogeography-based optimization," *IEEE Transactions on Evolutionary Computation*, vol. 12, no. 6, pp. 702-713, 2008.

[4] D. Karaboga and B. Basturk, "A powerful and efficient algorithm for numerical function optimization: artificial bee colony (ABC) algorithm," *Journal of Global Optimization*, vol. 39, no. 3, pp. 459-471, 2007.

[5] R. V. Rao, V. J. Savsani and D. P. Vakharia, "Teaching-learning-based optimization: a novel method for constrained mechanical design optimization problems," *Computer-Aided Design*, pp. 303-315, 2011.

[6] E. Atashpaz-Gargari and C. Lucas, "Imperialist Competition Algorithm: An Algorithm for Optimization Inspired by Imperialistic Competition.," *In IEEE Congress on Evolutionary Computation (CEC 2007)*, pp. 4661-4667, 2007.

[7] S. Saremi, S. Mirjalili and A. Lewis, "Grasshopper optimisation algorithm: theory and application," *Adv Eng Softw*, vol. 105, p. 30-47, 2017.

[8] S. Mirjalili, "The Ant Lion Optimizer," *Advances in Engineering Software*, vol. 83, pp. 80-98, 2015.

[9] M. Yazdani and F. Jolai, "Lion Optimization Algorithm (LOA): A Nature-Inspired Metaheuristic Algorithm," *Journal of Computational design and Engineering*, vol. 3, pp. 24-36, 2016.

[10] D. G. Msuya, "Pastoralism Beyond Ranching: A Farming System in Severe Stress in Semi-Arid Tropics Especially in Africa," *Journal of Agriculture and Ecology Research International*, vol. 4, no. 3, pp. 128-139, 2015.

[11] M. Q. Sutton and E. N. Anderson, *Introduction to Cultural Ecology*, Plymouth, UK: AltaMira Press., 2010.

[12] J. Gerald and R. Dorothy, *Pastoralism in Practice: Monitoring Livestock Mobility in Contemporary Sudan, Kenya: United Nations Environment Programme*, 2013.

[13] C. Liao, P. E. Clark, S. D. DeGloria, A. Mude and C. B. Barret, "Pastoral mobility and policy recommendations for livestock herding in the Borana pastoral system in Southern Ethiopia," *Solutions Journal*, vol. 7, no. 5, pp. 17-20, 2016.

[14] d. G. Gert, "Taking Indegenious Knowledge Serious: The case of Pastoral Strategies Among Turkana Nomads of Northwest Kenya," *ILEIA Newsletter*, Eldoret, Kenya, 2011.

[15] H. K. Adriansen, "Understanding pastoral mobility: the case of Senegalese Fulani," *The Geographical Journal*, vol. 174, no. 3, pp. 207-222, 2008.

[16] S. Hagler, "Patterns of Selection of Human Movements I: Movement Utility, Metabolic Energy, and Normal Walking Gaits," *Quantitative Biology > Quantitative Methods (q-bio.QM)*, pp. 1-21, 2016.

[17] M. Jamil and X. S. Yang, "A literature survey of benchmark functions for global optimization problems," *Int. Journal of Mathematical Modelling and Numerical Optimisation*, vol. 4, no. 2, pp. 150-194, 2013.